



MasterColor CDM 70W/940 Med ED17P CO ALTO+ FB

Product family description
Range of protected, high- efficiency long life ceramic metal halide lamps with a stable color over lifetime and a crisp, sparkling light to be used in open fixtures.

Features/Benefits

- Excellent color rendering.
- Superior color stability over life within $\pm 200\text{K}$.
- Lamp to lamp color consistency over life.
- Higher lumen maintenance than standard metal halide.
- Warm (3K) or fresh white (4K) color impression.
- High lamp efficacy (up to 93 lumens per watt) for energy saving and low heat.
- Universal operating position; suitable for open fixtures.
- Retrofit in existing ED- 17 sockets.
- FadeBlock for reduced fading risks.
- No shut off required in 24- hour- a- day/7- day- a- week operations (relamp fixtures at or before the end of rated life).
- Long lamp life compared to quartz metal halide lamps.

Applications

- Ideal for general lighting, downlighting and flood lighting.

Notes

- Requires a ballast specified or approved for Philips Metal Halide lamp or one designed to the indicated ANSI standard. A pulse ignitor is required. Sockets and wiring must withstand starting pulse. (391)
- Supply Volts must be $\pm 5\%$ of rated ballast line volts for reactor type and $\pm 10\%$ for CWA or electronic ballasts. (392)
- UV filtered design (FadeBlock). (396)
- This product utilizes ALTO® Lamp Technology. ALTO products pass the US EPA's Toxicity Characteristic Leaching Procedure (TCLP) for non- hazardous waste status. (399)
- MasterColor® Metal Halide Lamps are not recommended for use on dimmers and are not warranted if used on dimmer systems. (401)
- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average. For lamps with a rated average life of 24,000 hours, life is based on survival of 67% of the lamps. (351)
- Approximate lumen values listed are for vertical operation of the lamp. (352)

- Means Lumens is the approximate lumen output at 40% of lamp rated average life. (353)
- Heat resisting glass bulb.


Product data	
Product Number	360594
Full product name	MasterColor CDM 70W/940 Med ED17P CO ALTO+FB
Ordering Code	MHC70/C/U/MP/4K ALTO
Pack type	1 Sleeve Open End
Pieces per Sku	1
Skus/Case	12
Pack UPC	046677360597
EAN2US	
Case Bar Code	50046677360592
Successor Product number	
Base	Medium [Single Contact Medium Screw]
Base Information	Brass [Brass Base]
Bulb	ED17P [Protected]
Bulb Material	Hard Glass
Bulb Finish	Coated
Execution	Protected
Operating Position	Universal [Any or Universal (U)]
Packing Type	1SL [1 Sleeve Open End]
Packing Configuration	12
RatedAvgLife(See Family Notes)	20000 hr
Feature	ALTO® + FadeBlock™
Ordering Code	MHC70/C/U/MP/4K ALTO
Pack UPC	046677360597
Case Bar Code	50046677360592
ANSI Code HID	M143/M98/O
Watts	70W
Lamp Voltage	100 V
Mercury (Hg) Content	7.8 mg
Color Code	940 [CCT of 4000K]
Color Rendering Index	92 Ra8
Color Designation	Deluxe Cool White
Color Temperature	4000 K
Initial Lumens	5100 Lm
Design Mean Lumens	3640 Lm
Light Center Length L	3.438 in
Max Overall Length (MOL) - C	5.438 in
Diameter D	2.125 in
Product Number	360594




CDM ED17P CO



Cap-Base E26



CDM ED17P

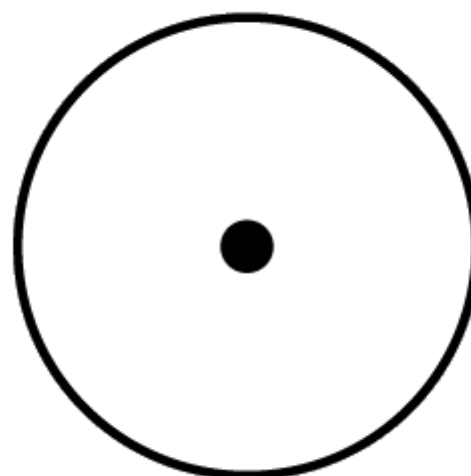

Operating Position any

