



# PAR30L LED Single Optic lamp with AirFlux Technology

12PAR30L/F25 3000 DIM AF SO 6/1

Philips PAR30L LED Retail Optic lamp with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

## Product data

### • General Characteristics

Cap-Base	E26
Bulb	PAR30L
Rated Avg. Life (Hours)	50000 hr
Rated Lifetime (years)	45.7 an

### • Light Technical Characteristics

Color Code	WH
Color Designation	White
Beam Angle	25 D
Beam Description	25D [Medium beam]
Correlated Color Temperature	3000 K
Approx. MBCP	5300 cd
CRI	80
Color Temp. (Kelvin)	3000 K [CCT 3000K]
Rated Luminous Flux	900 Lm

### • Electrical Characteristics

Wattage	12 W
Wattage Technical	12 W
Voltage	120 V
Line Frequency	60 Hz

Power Factor	0.9 -
Lamp Current mA	113 mA
Dimmable	Yes
Wattage Equivalent	75 W

### • Measuring Conditions

Switching cycle	20000x
-----------------	--------

### • Product Dimensions

Overall Length C	116 mm
Diameter D	92 mm

### • Product Data

Product number	430132
Full product name	12PAR30L/F25 3000 DIM AF SO 6/1
Short product name	12PAR30L/F25 3000 DIM AF RO 6/1
Pieces per Sku	1
eop_pck_cfg	6
Skus/Case	6
Bar code on pack	46677430139
Bar code on case	50046677430134
Logistics code(s)	929000251404
eop_net_weight_pp	0.240 kg

## Warnings and Safety

- Suitable for use in damp locations.


- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.



**PHILIPS**

# PAR30L LED Single Optic lamp with AirFlux Technology

## Dimensional drawing

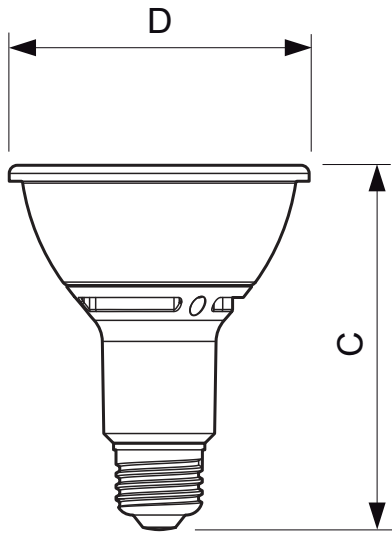

E26

### 12PAR30L/F25 3000 DIM AF SO 6/1

Product	C (Norm)	C1 (Max)	D (Norm)	D1 (Norm)
LED 12-75W E26 3000K 120V PAR30L 25D DIM	116	-	92	-



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, January 14  
data subject to change