

## LED Omni-directional A19




### Ordering Information

Model No.	Item name	Lumens <sup>2</sup> (lm)	Watts (w)	CCT <sup>1</sup> (k)	Efficacy (lm/w)	CRI	Lifetime <sup>3</sup> (h)	Beam Angle	Base type	Voltage (v)	Weight (lb)	Cerification	Equivalent <sup>4</sup> (w)
L4-A19D30C-6W-GU24	A19	470	6	2700	78	80	25000	>300°	GU24	120	0.32	UL,FCC, Energy Star <sup>5</sup>	40
L4-A19D30C-9W-GU24	A19	800	9	2700	89	80	25000	>300°	GU24	120	0.37	UL,FCC, Energy Star <sup>5</sup>	60

**3 THREE YEARS WARRANTY**



1. CCT Range complies to ANSI C78.377-2008.
  2. Thermally stable typical lumens ( $\pm 10\%$ )
  3. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.
  4. Equivalency based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.
  5. Energy Star® will be available in May, 2013.
- Note: All Information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party facility.  
 Note: All lamps meet Energy Star® Integral LED Lamp requirements, and will be submitted for testing.

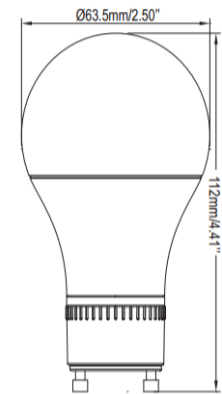

### Dimensions

Model	MOL	Diameter
A19	4.41"	2.50"

Note: Lamp shape conforms to ANSI C78.21-2003.  
 Note: Designed to comply with RoHS Directive 2002/95/EC.

### Energy Savings

Model No.	Equivalent	Energy Savings
L4-A19D30C-6W	40W Incandescent	<b>\$94</b>
L4-A19D30C-9W	60W Incandescent	<b>\$135</b>

\*Actual Equivalent Replacement, based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.  
 Note: Energy Savings based on using one bulb for 25,000 hr rated life at 11¢/kWh. Does not include maintenance and replacement lamp savings.