


# 120V LED DISK LIGHT



**120V LED DISK Light** provides versatile lighting in line voltage. It makes us easy to upgrade your building new ceiling downlight to energy efficient LED disk light to eliminate the traditional recess can, baffles and provided elegant surface. It can be simply mounted on to a junction box. And it also can be replaced in existing recess can by adding related hardware mounting adaptor.

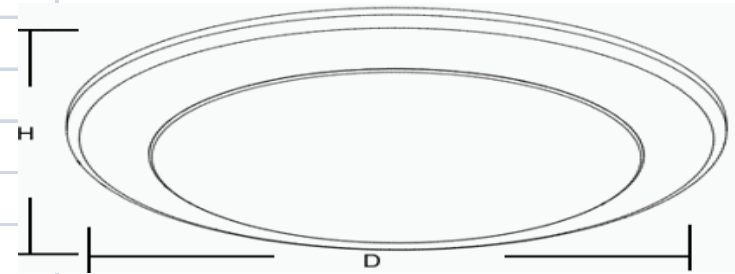


White / Bronze / Brush Nickel

D= 5.9" for 4" Can / 7.4" for 6" Can H=1.26"

**NO CAN DEEDED !**


## INSTALLATION

1

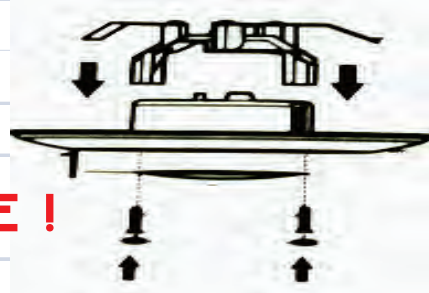


**DIMMABLE !**


2

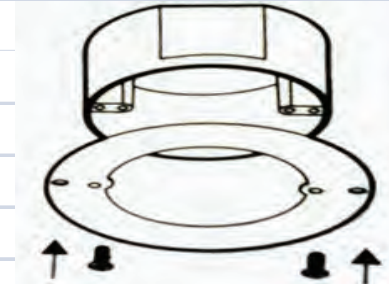

3

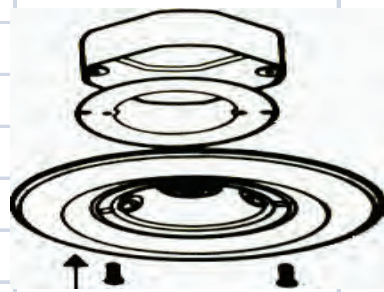

4

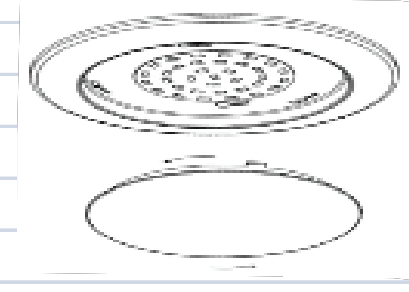

4" can for 60 degree angle  
6" can for 120 degree angle

Kitchen Counter  
Retail Environments

Cabinets  
Display Cases

Architectural Built-ins  
Medical Facilities

Hallways  
Workstations

## TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation
Construction	Heavy-Gage, metal housing, Powder Coated White
Dimensions	H = 1.26", D = 5.9"/7.4"
Listing	ETL & CETL
Wattage	12W 31pcs LED Clips, 15W 36 pcs LED Chips
Lumens	light source lumens: 1070; fixture lumens: 913 for 4" Can light
Lumens	light source lumens: 1250; fixture lumens: 1060 for 6" Can light
Diffuser	Translucent White PC Opal Diffuser.
Packaging	Corrugated box with model number and short description for a kit
Lamp specs	120V SMD5630 LED Warm white. 50,000 average life hours
Hardware	Two mounting screws, wire ends with quick connectors to accept #14 gage Romex bare wire cord
Accessories	Recess replacement adaptor hardware provided separately
Wet Location	Wet Location approved

Model No	Finish	Specification Description
LED-SM4D/WT	White	4" 120V, One Engine LED 1070 lumens without diffuser, 913 lumens with diffuser. 12W 3000k warm white with 20w driver Max. Dimmable. Recess and Surface mounted. White finish.
LED-SM6D/WT	White	6" 120V, 36 LEDs 1250 lumens without diffuser, 1060 lumens with diffuser. 15W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. White finish.
LED-SM4D/BN	Brush Nickel	4" 120V, One Engine LED 1070 lumens without diffuser, 913 lumens with diffuser. 12W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Brush Nickel finish.
LED-SM6D/BN	Brush Nickel	6" 120V, 36 LEDs 1250 lumens without diffuser, 1060 lumens with diffuser. 15W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Brush Nickel finish.
LED-SM4D/BZ	Bronze	4" 120V, One Engine LED 1070 lumens without diffuser, 913 lumens with diffuser. 12W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Bronze finish.
LED-SM6D/BZ	Bronze	6" 120V, 36 LEDs 1250 lumens without diffuser, 1060 lumens with diffuser. 15W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Bronze finish.
LED-SM4D/BK	Black	4" 120V, One Engine LED 1070 lumens without diffuser, 913 lumens with diffuser. 12W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Black finish.
LED-SM6D/BK	Black	6" 120V, 36 LEDs 1250 lumens without diffuser, 1060 lumens with diffuser. 15W 3000k warm white with 20w driver. Dimmable. Recess and Surface mounted. Black finish.