

### POWERSTRIKE™ METAL HALIDE LAMPS

- Pulse Start technology • White light
- Good and stable color rendering as lamps age • Faster hot re-strike
- Excellent lumen maintenance • Enclosed fixture only

Watts	Bulb	Base	Item#	Description	ANSI	Case		Operating Position	Dimensions		Lumens			Color		Manufacture Production Code
						Qty.	Finish		MOL (in)	LCL (in)	Initial (lm)	Mean (lm)	Avg. Life (Hours)	Temp (K)	CRI	
<b>Powerstrike™ Metal Halide Lamps - Mogul Screw Base</b>																
400	ED28	E39	1589	MS400/ED28/PS/U/4K	M155/E,M135/E	12	Clear	Universal	8.31	5.00	39000	27000	20000	4200	65	N04009181402
			*1624	MS400/ED28/C/PS/U/4K	M155/E,M135/E	12	Coated	Universal	8.31	5.00	37000	25700	20000	4000	70	N04009182402
			1590	MS400/ED28/PS/BU/4K	M155/E,M135/E	12	Clear	BU±15°	8.31	5.00	44000	35000	20000	4200	65	N04009181412
			*1591	MS400/ED28/C/PS/BU/4K	M155/E,M135/E	12	Coated	BU±15°	8.31	5.00	42000	33000	20000	4000	70	N04009182412
			1547	MS400/ED28/PS/V/4K	M155/E,M135/E	12	Clear	VER±15°	8.31	5.00	44000	35000	20000	4200	65	N04009181422
			*1548	MS400/ED28/C/PS/V/4K	M155/E,M135/E	12	Coated	VER±15°	8.31	5.00	42000	33000	20000	4000	70	N04009182422
			1552	MS400/ED28/PS/H75/4K	M155/E,M135/E	12	Clear	HOR±75°	8.31	5.00	40000	32000	20000	4200	65	N04009181432
	*1553	MS400/ED28/C/PS/H75/4K	M155/E,M135/E	12	Coated	HOR±75°	8.31	5.00	39000	31000	20000	4000	70	N04009182432		
	ED37	E39	1592	MS400/ED37/PS/U/4K	M155/E,M135/E	12	Clear	Universal	11.50	7.00	39000	27000	20000	4200	65	N04009171402
			1593	MS400/ED37/PS/BU/4K	M155/E,M135/E	12	Clear	BU±15°	11.50	7.00	42000	31000	20000	4200	65	N04009171412
			*1594	MS400/ED37/C/PS/BU/4K	M155/E,M135/E	12	Coated	BU±15°	11.50	7.00	42000	29000	20000	4000	70	N04009172412
			1549	MS400/ED37/PS/V/4K	M155/E,M135/E	12	Clear	VER±15°	11.50	7.00	42000	31000	20000	4200	65	N04009171422
			*1625	MS400/ED37/C/PS/V/4K	M155/E,M135/E	12	Coated	VER±15°	11.50	7.00	42000	29000	20000	4000	70	N04009172422
			1551	MS400/ED37/PS/H75/4K	M155/E,M135/E	12	Clear	HOR±75°	11.50	7.00	40000	32000	20000	4200	65	N04009171432
*1550			MS400/ED37/C/PS/H75/4K	M155/E,M135/E	12	Coated	HOR±75°	11.50	7.00	39000	31000	20000	4000	70	N04009172432	
T15	E39	*1653	MS400/T15/PS/H75/4K	M155/E,M135/E	24	Clear	HOR±75°	11.50	7.00	39000	31000	20000	4200	65	N04009351432	
450	ED37	E39	*1626	MS450/ED37/PS/V/4K	M144/E	12	Clear	VER±15°	11.50	7.00	50000	40000	20000	4000	68	N04509171422
			*1627	MS450/ED37/C/PS/V/4K	M144/E	12	Coated	VER±15°	11.50	7.00	47000	37000	20000	3700	70	N04509171422
750	BT37	E39	1508	MS750/BT37/PS/HBU/4K	M149/E	12	Clear	HOR-BU	11.50	7.00	80000	60000	16000	4200	65	N07509271402
			*1638	MS750/BT37/C/PS/HBU/4K	M149/E	12	Coated	HOR-BU	11.50	7.00	75000	56000	16000	4000	70	N07509272402
875	BT37	E39	*1628	MS875/BT37/PS/BU/4K	M166/E	12	Clear	BU±15°	11.50	7.00	100000	80000	20000	4000	68	N08759271412
			*1629	MS875/BT37/PS/BD/4K	M166/E	12	Clear	BD±15°	11.50	7.00	100000	80000	20000	4000	68	N08759271442
			*1630	MS875/BT37/PS/HOR/4K	M166/E	12	Clear	HOR±75°	11.50	7.00	95000	76000	12000	4000	68	N08759271432
1000	BT37	E39	1509	MS1000/BT37/PS/U/4K	M141/E	12	Clear	Universal	11.50	7.00	110000	96000	15000	4200	65	N10009271402
			BT56	E39	*1598	MS1000/BT56/PS/BU/4K	M141/E	6	Clear	BU±15°	15.38	9.50	110000	86000	10000+	4200
				*1599	MS1000/BT56/C/PS/BU/4K	M141/E	6	Coated	BU±15°	15.38	9.50	105000	80000	10000+	4000	70


\* Items only available for special orders

All measurements are shown in inches unless noted

Manage in Accordance with Disposal Laws

See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-866-666-6850

See page 22/23/24 for safety handling and warning purposes

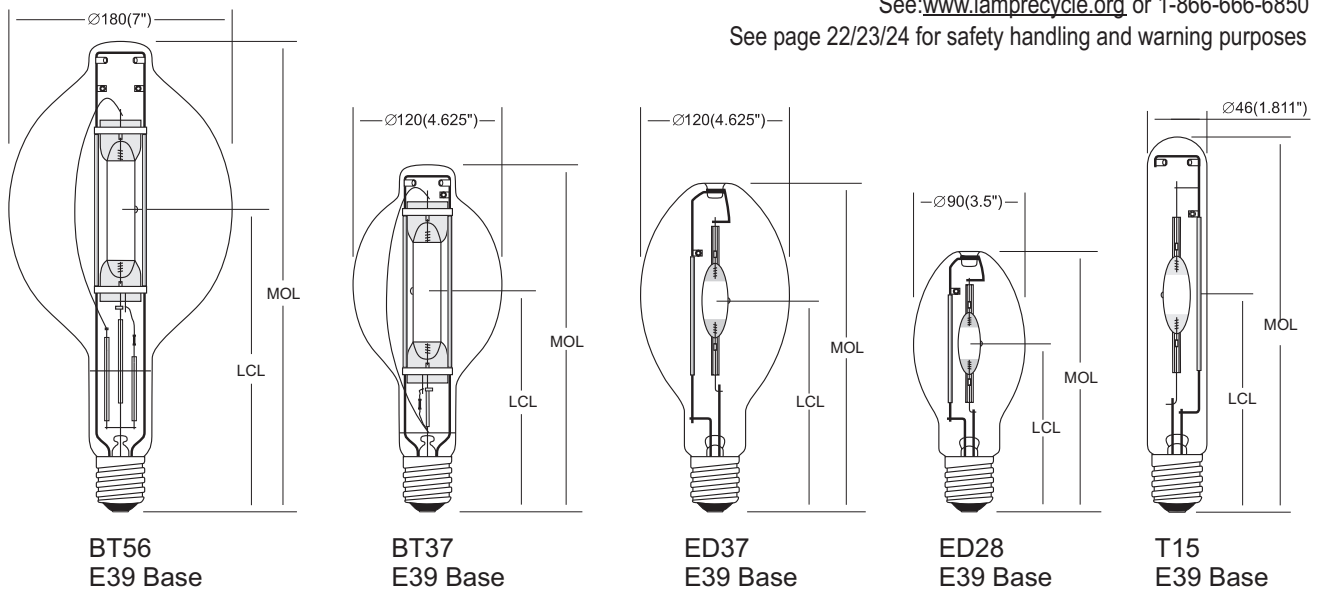

HIGH INTENSITY DISCHARGE LAMPS