

## LED Series

### Element Outdoor Decorative LED Emergency Light



**WPDLEDEM**

#### **Housing:**

Durable and Vandal-Resistant Die-Cast Aluminum Housing with 1/2" Coin Plug for Conduit. Includes Integrated Photocell, Switchable Between Photocell or Wall Switch Control. Low Profile, ADA Compliant.

#### **Lens:**

UV-Resistant Polycarbonate Lens

#### **Reflectors:**

Mirrored Reflector

#### **Battery Backup:**

- NiCad Battery Backup (4.8V, 2.8A). Supplies 90 Minutes of Emergency Operation.
- 250 Lumen Output in Emergency Mode.
- Self-Test/Self Diagnostics Included.
- Low-Voltage Battery Disconnection Prevents Deep Battery Discharge Damage.
- 24 Hour Recharge After 90 Minute Discharge.

#### **Mounting:**

Wall or Ceiling Mount Over a Recessed Junction Box or Use Surface Conduit.

#### **LED Module:**

Luminous Flux 1050  
CRI: 75, CCT: 5000K  
50,000 Hours

#### **Wattage:**

LED: 11w (14 System Watts)

#### **Driver:**

Input Voltage: 120/277V

#### **Listing & Ratings:**

UL: Listed for Wet Locations  
IP65

Custom Colors Available on Request.

**QSSI**

Lighting & Electrical Products Group

Phone: (813) 316-2221

Fax: (813) 855-3717

Email: [customerservice@qssi.com](mailto:customerservice@qssi.com)


#### **Complete Units**

Catalog #	Description
WPDLEDEM14D5K*	Element Outdoor Decorative LED Emergency Light

\*Specify Color: W=White, Z=Bronze

**LD**

**DIMENSIONS**

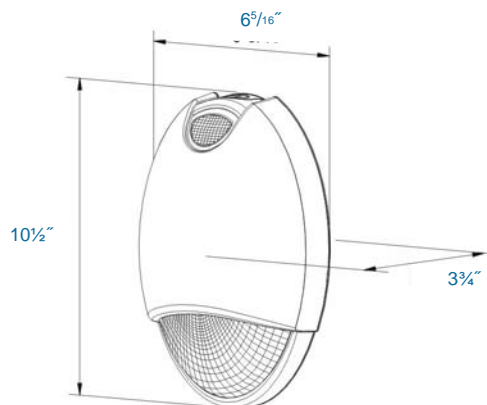


**WPDLEDEM**

LD

PHOTOMETRICS

LD-236

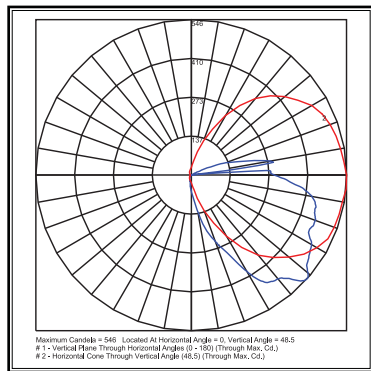

WPDLEDEM14D5K

## LED Series

### Element Outdoor Decorative LED Emergency Light

**QSSI**

Lighting & Electrical Products Group  
12802 Commodity Place  
Tampa, FL 33626  
Visit Us At: [www.qssi.com](http://www.qssi.com)