
Weight: 0.0 lbs

# GNLED13NB

Gooseneck LED Head only. Order in combination with Arm and shade. Available in various color temperatures.

LED Info Driver Info

**Constant Current** Watts: 13W Type: 4000K (Neutral) 120V: 0.3 A Color Temp: Color Accuracy: N/A 208V: 0.3 A L70 Lifespan: 100000 240V: 0.3 A LM79 Lumens: 643 277V: 0.15 A Efficacy: **43 LPW** Input Watts: 15W Efficiency: 86%

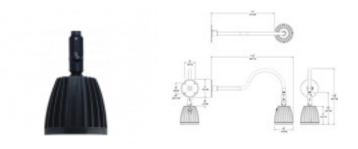

## **Technical Specifications**

#### **UL Listing:**

Suitable for wet locations. Suitable for mounting within 4' of the ground.

#### **Lumen Maintenance:**

The LED will deliver 70% of its initial lumens at 100,000 hours of operation.

#### Driver:

Single multi-chip, 13W high-output, long-life LED Driver Constant Current.

#### Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screw.

### **Thermal Management:**

Custom heat sink assembly in thermal contact with die-cast aluminum housing for superior heat sinking.

#### Housing:

Precision die-cast aluminum housing, lens frame and mounting plate.

#### Gaskets:

High Temperature Silicone

#### Finish:

Chip and fade resistant polyester powder coat finish.

## **Surge Protection:**

4kv

#### **Color Temperature (Nominal CCT):**

4000K

#### **Fixture Efficacy:**

42.6 Lumens per Watt

### **Color Accuracy:**

Color: Black

**87 CRI** 

## **Color Stability:**

RAB LED products significantly exceed Energy Star Requirements for Chromatic Stability during LM-80 Testing.

## **Color Uniformity:**

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

## **Green Technology:**

RAB LEDs are Mercury and UV free.

## **IESNA LM-79 & IESNA LM-80 Testing:**

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

#### Patents:

The design of the Gooseneck is protected by patents pending in US, Canada, China and Taiwan.

## Warranty:

RAB LED fixtures give you peace of mind because both the fixture and driver components are backed by RAB's 5 Year Warranty. For more information,

Page 1 of 2

## **Country of Origin:**

Designed by RAB in New Jersey and assembled in Taiwan



Email: sales@rabweb.com

On the web at: www.rabweb.com

Note: Specifications are subject to change without notice

# GNLED13NB - continued

# **Trade Agreements Act Compliant:**

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

# **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4

# **Ambient Temperature:**

Suitable for use in 40°C ambient temperatures.

