



# PLF26



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

High quality polycarbonate PL floodlight. Supplied with one, two or three 13 watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

## SPECIFICATIONS

### UL Listing

Suitable for wet locations. (PLF 13 &26) For side wall mounting only

### Housing and Lens

Corrosionproof and vandal resistant polycarbonate

### Lens Gasket

High temperature tubular silicone

### Reflector

Anodized aluminum

### Sockets

GX23 base

### Lamp

Two 13 watt compact fluorescent lamps supplied with fixture

### Minimum Temperature

0°F

### Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

### Country of Origin

Designed by RAB in New Jersey and assembled in Taiwan

### Trade Agreements Act Compliant

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

### GSA Schedule

This product is suitable for listing on the GSA Schedule of the US General Services in accordance with FAR Subpart 25.4


### Color

Bronze

### Weight

2.56

## DIMENSIONS

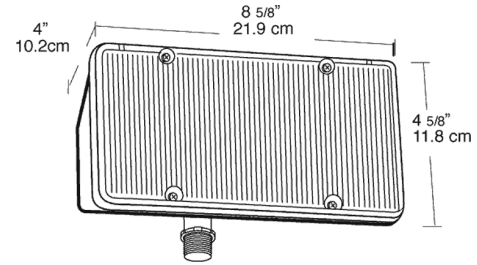

## ORDERING INFORMATION

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
26	13W Twin	GX23	NPF 120V					0.0		1800	10000

### Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice