


QB1VG

75 watt Quartz Bullet Flood with silicone O-ring gasket, thick tempered glass lens, internal and external cooling fins. Gold plated socket contacts and 250°C Teflon coated wires for extended lamp life. Lamp supplied.

Color: Verde green

Weight: 1.0 lbs

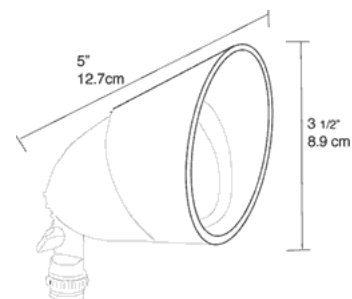

Lamp Info

Type: T-4
 Watts: 75W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: 1,500
 Lamp Lumens: 1,500
 Efficacy: 20 LPW

Ballast Info

Type: 0
 120V: N/A
 208V: 0
 240V: N/A
 277V: N/A
 Input Watts: 75W
 Efficiency: 100%

Technical Specifications

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground

Housing:

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel and EZ Grip lock nut fits all standard mounting covers.

Lens Gasket:

High temperature silicone gasket stays in place during relamping

Reflector:

Semi-specular anodized aluminum

Sockets:

Porcelain bi-pin GY 8 base with gold plated contacts and 250°C socket wires

Lens:

Thick, tempered glass

Finish:

Chip and fade resistant polyester powder coating

Replacement Lamps:

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

: