



QB2W



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Twin 75 watt Quartz Bullet floods come pre-assembled and pre-wired on C103 Mounting plate. Lamps supplied.

SPECIFICATIONS

UL Listing

Suitable for wet locations. Suitable for mounting within 4' of the ground

Housing

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel and EZ Grip lock nut fits all standard mounting covers.

Lens Gasket

High temperature silicone gasket stays in place during relamping

Reflector

Semi-specular anodized aluminum

Sockets

Porcelain bi-pin GY 8 base with gold plated contacts and 250° C socket wires

Lens

Thick, tempered glass

Finish

Chip and fade resistant polyester powder coating

Replacement Lamps

Installation

Twin 75w Flood Kit pre-assembled on C103 plate for easy installation

Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Color

White

Weight

2.08

ORDERING INFORMATION

Quartz Halogen

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
75	T-4	bi-pin (GY8.0)	0	0	0	0	75.0	0	1500	1500	


Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice


RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com © 2011

DIMENSIONS

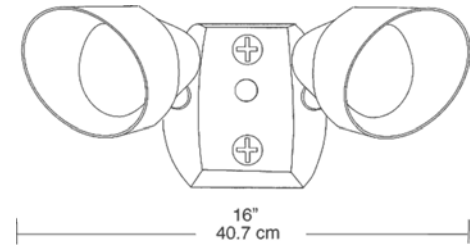

PHOTOMETRIC

75w Fixture @ 4' Mounting Height Aimed 60° Below Horizontal



Mounting Height	Multiplier
4'	1.0
6'	.44
8'	.25
10'	.16
12'	.11