

RAB LIGHTING

STL200H

JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

STEALTH 110 Sensor with twin precision die cast H101 Deluxe shielded floods pre-wired and assembled on universal CU4 cover plate.

SPECIFICATIONS

UL Listing

Suitable for wet locations

Power Consumption

1 watt

Time Adjustment

5 seconds to 12 minutes

Surge Protection

Withstands up to 6000 volts

Wide Sensitivity Control

Adjustable from 100% to 30%

Temperature Compensation

Sensitivity adjusts automatically for consistent detection in hot and cold ambient temperatures

Wall Switch Manual Override

Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed

LED Detection Indicator

Shows when sensor is detecting in daytime and glows red at night for "on-guard" deterrence

Advanced Detection Logic

Minimizes false triggers

Color Matched Lens

Dark lens with bronze units, white lens with white units

RF Immunity

Circuits fully shielded for maximum radio frequency immunity

Horizontal Lock, No-tool Joints

Keeps sensing pattern level for fast, error-free installation

Photoelectric Control

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications

Floodlights

Precision die cast aluminum. 1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes and covers

Lamp

Accepts PAR38 lamps, 150 watt max. Lamps are not supplied.

Voltage

120 Volts AC 60 Hertz

Lens Mask

Customized press apply lens mask included to reduce coverage easily

Detection

200° view

Switching Capacity

1000 watts incandescent @ 120 volts, 8 amps

Patents

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Warranty

10 year sensor warranty


Color

Bronze


Weight

5

DIMENSIONS

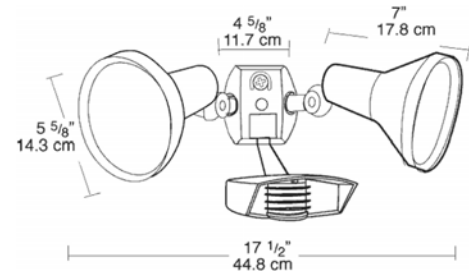

DETECTION PATTERN

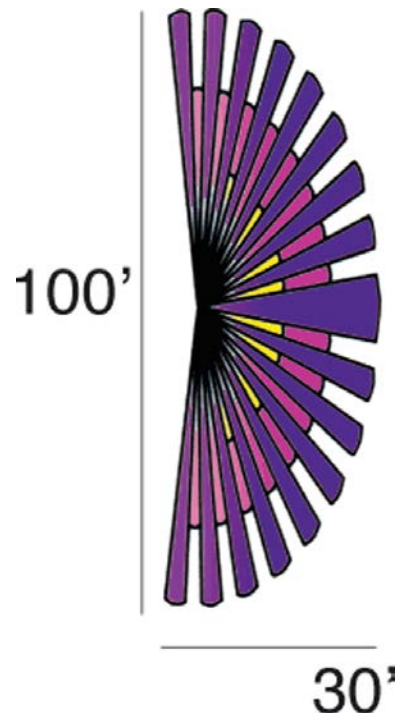

Note: Specifications may change without notice