


### DESCRIPTION

|                                   |                                    |   |  |
|-----------------------------------|------------------------------------|---|--|
| <b>CATALOG:</b><br>E-725-U-180-R1 | <b>BALLAST TYPE:</b><br>Electronic | <b>STARTING METHOD:</b><br>Programmed Rapid Start | <b>NUMBER OF LAMPS - LAMP TYPE:</b><br>1 F80W T5 |
|-----------------------------------|------------------------------------|---|--|

### ELECTRICAL CHARACTERISTICS

|   |                            |                                   |  |                           |                                  |                                 |                          |
|---|----------------------------|-----------------------------------|--|---------------------------|----------------------------------|---------------------------------|--------------------------|
| <b>INPUT VOLTAGE:</b><br>120 – 277 V~ +/- 10% | <b>LAMP WATTS:</b><br>80 W | <b>INPUT WATTS:</b><br>80 to 95 W | <b>INPUT CURRENT:</b><br>0,690 – 0,300 A | <b>OCV:</b><br>900 V~ Min | <b>PF:</b><br>> 0,98             | <b>FREQUENCY:</b><br>50 / 60 Hz | <b>SOUND RATED:</b><br>A |
| <b>MIN START TEMP:</b><br>32°F / 0°C          | <b>CLASS:</b><br>P         | <b>TYPE:</b><br>1 outdoor         | <b>BALLAST FACTOR:</b><br>90%            | <b>BEF:</b><br>1,1        | <b>LAMP CONNECTION:</b><br>Serie | <b>THD (1):</b><br>< 15 %       | <b>NO PCB'S</b>          |

### PHYSICAL CHARACTERISTICS
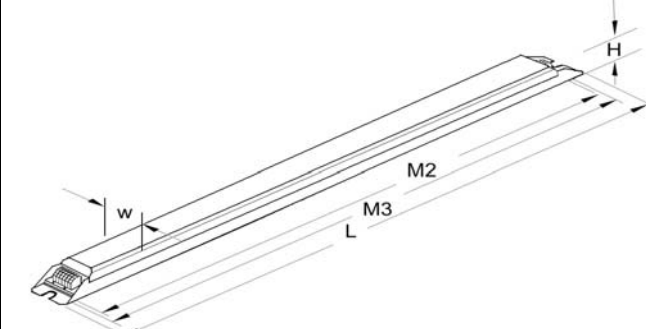
|  | CASE DIMENSIONS    |       |                   |                  |                  |                |                 |
|---|--------------------|-------|-------------------|------------------|------------------|----------------|-----------------|
|   | UNITS              | M1    | M2                | M3               | W                | L              | H               |
|   | INCHES<br>TOL(+/-) | N/A   | 16,0625<br>0,0125 | 16,375<br>0,0125 | 1,1875<br>0,0125 | 16,5<br>0,0125 | 1,125<br>0,0125 |
|   | MM<br>TOL(+/-)     | N/A   | 407,9<br>0,31     | 415,9<br>0,31    | 30,2<br>0,31     | 419,1<br>0,31  | 28,6<br>0,31    |
| <b>LEAD LENGTH</b>  |                    |       |                   |                  |                  |                |                 |
| UNITS   | BLACK              | WHITE | RED               | BLUE             | BLUE             |                |                 |
| INCHES<br>TOL(+/-)  | N/A                | N/A   | N/A               | N/A              | N/A              |                |                 |
| MM<br>TOL(+/-)  | N/A                | N/A   | N/A               | N/A              | N/A              |                |                 |

### CARTON CHARACTERISTICS

|                              |   |                          |  |                                 |   |                                 |
|------------------------------|---|--------------------------|--|---------------------------------|---|---------------------------------|
| <b>UNITS/CARTON</b><br>10    | <b>CARTONS/LAYER</b><br>14                        | <b># OF LAYERS</b><br>10 | <b>UNITS/PALLET</b><br>1400                        | <b>PIECE WEIGHT</b><br>0,57 Kg. | <b>CARTON WEIGHT</b><br>5,9 Kg.   | <b>PALLET WEIGHT</b><br>848 Kg. |
| <b>CARTONS/PALLET</b><br>140 | <b>CARTON DIMENSIONS</b><br>44,5 x 17,3 x 7,5 cm. |                          | <b>PALLET DIMENSIONS</b><br>8,8 x 121,1 x 75,1 cm. |                                 | <b>PALLET DIMENSIONS LOADED , INCLUDING WOOD PALLET</b><br>101,6 x 121,9 x 76,2 cm. |                                 |


### MISC.

|  |
|--|
|  |
|--|


#### CARTON LABEL



#### ELECTRICAL DIAGRAM

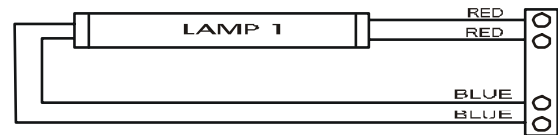

#### PRODUCT LABEL




ISO 9001:2000



Lighting and Power Source  
2840 Keller Springs Road,  
Suite 1102 & 1103  
Carrollton, TX 75006 – 4832  
Tel : (888) 385-4448  
Fax : (972) 418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.