

DESCRIPTION


CATALOG: E-750-F-230/232-LP-SC	BALLAST TYPE: Electronic	STARTING METHOD: Instant Start	NUMBER OF LAMPS - LAMP TYPE: 2 - F24T12, F48T12/SS or 1 - F48T12/SS, F72T12, F96T12/SS
--	------------------------------------	--	--

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE: 120 V ~ ±10%	LAMP WATTS: 21/30/32/55/60 w	INPUT WATTS: 50 w	INPUT CURRENT: 0.45 A	OCV: 730 v	PF: > 0.90	FREQUENCY: 50/60 Hz	SOUND RATED: A
MIN START TEMP: 32°F / 0°C	CLASS: P	TYPE: 1 outdoor	BALLAST FACTOR: 0.75	BEF: 1.5	LAMP CONNECTION: PARALLEL	THD (1): < 25%	NO PCB'S

(1) FOR 2-F48T12/SS

PHYSICAL CHARACTERISTICS

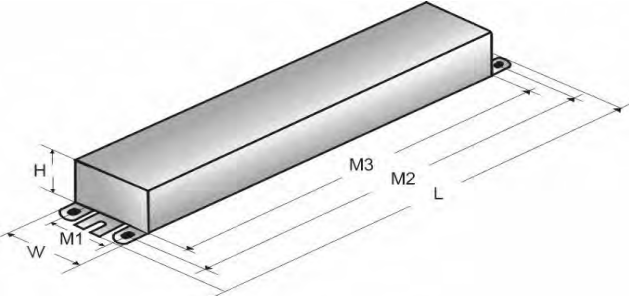	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	1.22	8.90	8.35	1.70	9.50	1.18
	TOL(+/-)	0.01	0.01	0.01	0.05	0.05	0.05
	MM	31	226	212	43	241	30
	TOL(+/-)	0.25	0.25	0.25	1.30	1.30	1.30
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE			
INCHES	33	33	26.5	26.5			
TOL(+/-)	3/8	3/8	3/8	3/8			
MM	838	838	673	673			
TOL(+/-)	10	10	10	10			

CARTON CHARACTERISTICS

UNITS/CARTON 20	CARTONS/LAYER 12	# OF LAYERS 7	UNITS/PALLET 1680	PIECE WEIGHT 1.3 lbs	CARTON WEIGHT 27 lbs	PALLET WEIGHT 2,345 lbs
CARTONS/PALLET 84	CARTON DIMENSIONS 12.75" x 12.00" x 4.50"		PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED, INCLUDING WOOD PALLET 40" x 48" x 39"		


MISC.

--


CARTON LABEL



ELECTRICAL DIAGRAM

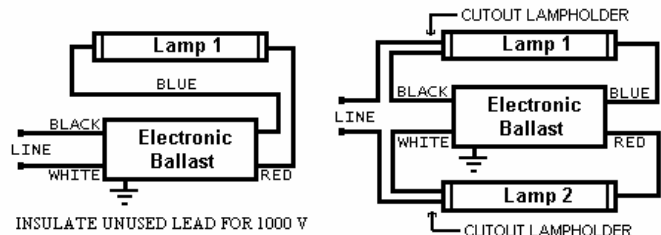

PRODUCT LABEL

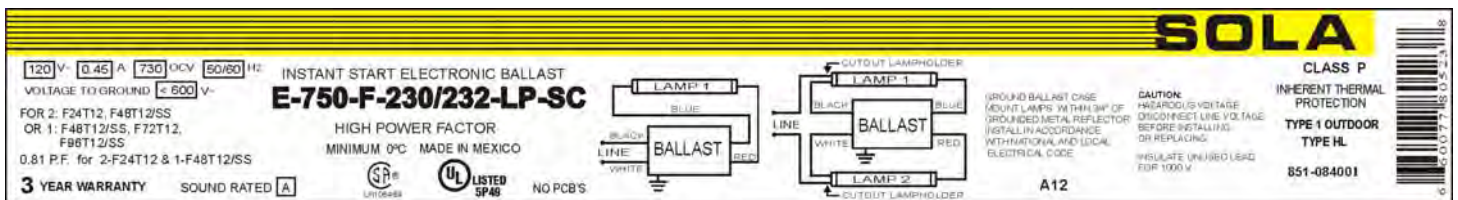


ISB LIGHTING & POWER SOURCE

2840 KELLER SPRINGS ROAD,
SUITES 1102 AND 1103
CARROLLTON, TX. 75006
U.S.A.

Tel. 972-416-4500
Fax. 972-418-5858

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Made in Mexico by Industrias Sola Basic S.A. de C.V.