

DULUX® T/E Compact Fluorescent Lamps

4-Pin Compact Fluorescent Lamps



SYLVANIA DULUX T/E compact fluorescent lamps are ideal for use in a wide range of applications. They are designed to be operated on energy efficient electronic and dimming ballasts.

SYLVANIA DULUX T/E lamps are long-life, energy-saving alternatives for incandescent lamps. Short lamp design with photometric benefits of a triple tube lamp provides for efficient fixture design.

Key Features & Benefits

- Fast run-up to full brightness
- Passes Federal TCLP Test*
- Operates on various ballast systems
 - Flicker free start on electronic ballasts
 - Compatible with QUICKTRONIC® PROStart® CF
- RoHS compliant
- Consumes 75% less power than incandescent of comparable light output
- High luminous efficacy
- Long 12,000 hour average rated life
- Rare earth tri-phosphor with 82 CRI
- 2700K, 3000K, 3500K and 4100K

* Regulations may vary. Check your local and state regulations.

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.



Product Offering

Lamp	Wattage	Rated Lumens
CF13DT/E	13	900
CF26DT/E	26	1,800
CF32DT/E	32	2,400

System Comparison

Lamp Type	Rated Lamp Life (hrs.)	System Lumens	System Wattage	System LPW	Energy Savings
100W Incandescent	750	1,710	100	17	—
DULUX T/E 26W w/QUICKTRONIC CF	12,000	1,800	28	64	\$86

Application Information

Applications

- Garden and walkway lighting
- Recessed ceiling fixtures
- Task and downlights
- Wall sconces

Fixtures

Contact your local fixture agent for available fixtures.

Ballast Information

Contact your OSRAM SYLVANIA representative for a list of compatible operating systems.

Application Notes

1. 4-Pin lamps designed for dimming and electronic ballast operation.
2. Minimum starting temperature depends on ballast.
3. Rule of thumb: to estimate the appropriate compact fluorescent lamp wattage, divide the incandescent wattage by 4.
4. Equipment manufacturers are advised to consult ANSI and IEC standards for the maximum allowable dimensions and temperature to insure compatibility with similar products.
5. QUICKTRONIC PROStart CF electronic ballasts are UCSA Certified and FCC 47CFR Part 18 Consumer Rated.
6. QUICKTRONIC ballasts feature QUICKSENSE® circuitry for end-of-life protection required by NEMA.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	Date

Ordering Information

Item Number	Ordering Abbreviation	NEMA Generic Designation	Base	Watts	Volts ¹	Amps ¹	Initial Lumens	Mean Lumens ²	CCT	CRI	Avg. Rated Life (hrs.) ³
20891	CF13DT/E/827/ECO	CFM13W/GX24q/827	GX24q-1	13	90	.175	900	774	2700K	82	12,000
20892	CF13DT/E/830/ECO	CFM13W/GX24q/830	GX24q-1	13	90	.175	900	774	3000K	82	12,000
20893	CF13DT/E/835/ECO	CFM13W/GX24q/835	GX24q-1	13	90	.175	900	774	3500K	82	12,000
20894	CF13DT/E/841/ECO	CFM13W/GX24q/841	GX24q-1	13	90	.175	900	774	4100K	82	12,000
20767	CF26DT/E/827/ECO	CFM26W/GX24q/827	GX24q-3	26	80	.300	1,800	1,548	2700K	82	12,000
20736	CF26DT/E/830/ECO	CFM26W/GX24q/835	GX24q-3	26	80	.300	1,800	1,548	3000K	82	12,000
20641	CF26DT/E/827/ECO	CFM26W/GX24q/841	GX24q-3	26	80	.300	1,800	1,548	2700K	82	12,000
20995	CF26DT/E/835/ECO/BL1	CFM26W/GX24q/835	GX42q-3	26	80	.300	1,800	1,548	3500K	82	12,000
20768	CF32DT/E/827/ECO	CFM32W/GX24q/827	GX24q-3	32	100	.320	2,400	2,064	2700K	82	12,000

1. Measured on high frequency ballast.

2. Measured at 40% of rated life.


3. Based on 3 hours per start. Number of operating hours when half have failed and half are still functional.

Ordering Guide

CF	26	DT	/	E	/	827	/	ECO
Compact Fluorescent	Wattage	DULUX Triple		Electronic Ballast		8 = 82 CRI 27 = 2700K CCT 30 = 3000K CCT 35 = 3500K CCT 41 = 4100K CCT		ECOLOGIC®


Technical Information

Dimensions

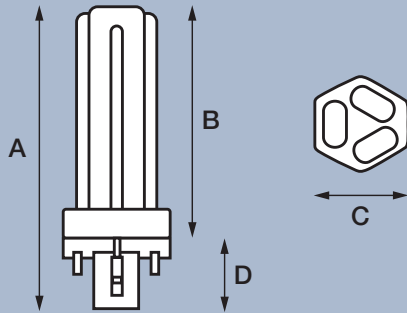


Lamp	(A) MOL in. (mm)	(B) Max. Base Face to Top of Lamp in. (mm)	(C) Max. Base Width in. (mm)	(D) Guide Post Length in. (mm)
CF13DT/E	4.17 (106)	3.54 (90)	1.90 (48)	0.62 (16)
CF26DT/E	4.96 (126)	4.33 (110)	1.90 (48)	0.62 (16)
CF32DT/E	5.6 (142)	4.96 (126)	1.90 (48)	0.62 (16)





Typical Fluorescent Lamp Mortality

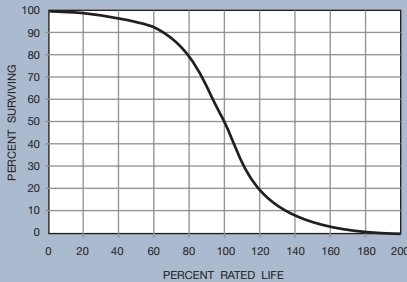

Lumen Maintenance Curve

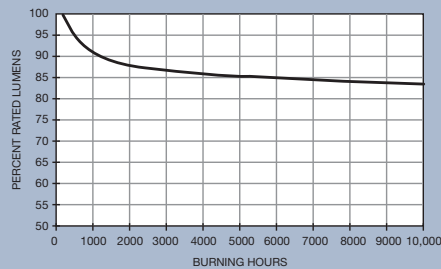

Spectral Power Distributions

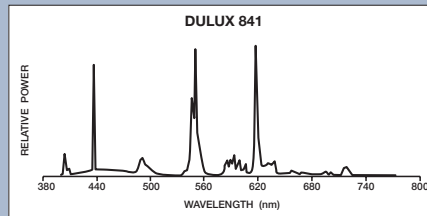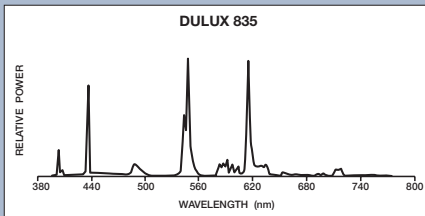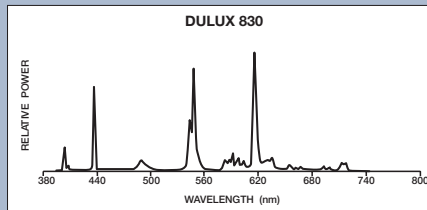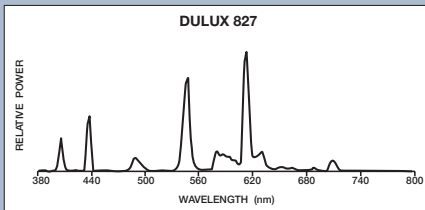

Sample Specification

Lamp(s) shall be (a) DULUX® (CF13DT/E, CF26DT/E or CF32DT/E) ECO® lamps, with end-of-life shutdown protection and pass existing Federal TCLP limits. Lamp(s) shall have an average rated life of 12,000 hours, a correlated color temperature of (2700K, 3000K, 3500K or 4100K), and a CRI of 82. Lamps shall have a (GX24q-2, -3, -4 or -5) plug-in, 4-pin base and be suitable for use on electronic and dimming ballasts. Lamps shall be operated by QUICKTRONIC® ballasts. Both lamps and ballasts are covered by the QUICK 60+® system warranty.

Warranty Information

Limited 6 month lamp warranty and a five year ballast warranty is possible if both lamps and ballasts are provided by OSRAM SYLVANIA. See the QUICK 60+ warranty for details and restrictions.

United States

OSRAM SYLVANIA

100 Endicott Street
Danvers, MA 01923
1-800-LIGHTBULB

Trade

Phone: 800-255-5042
Fax: 800-255-5043

National Accounts

Phone: 800-562-4671
Fax: 800-562-4674

OEM/Special Markets

Phone: 800-762-7191
Fax: 800-762-7192

Retail

Phone: 800-842-7010
Fax: 800-842-7011

SYLVANIA Lighting Services

Phone: 800-323-0572
Fax: 800-537-0784

Display/Optic

Phone: 888-677-2627
Fax: 855-543-1043

Canada

OSRAM SYLVANIA LTD.

2001 Drew Road
Mississauga, ON L5S 1S4
1-800-LIGHTBULB

Trade

Phone: 800-263-2852
Fax: 800-667-6772

OEM/Special Markets/Display/Optic

Phone: 800-265-2852
Fax: 800-667-6772

Retail

Phone: 800-720-2852
Fax: 800-667-6772

SYLVANIA Lighting Services

Phone: 800-663-4268
Fax: 866-239-1278

Mexico

OSRAM MEXICO

Tultitlan/Edo de Mexico
Phone: 011-52-55-58-99-18-50

ENCELIUM Technologies

United States

Phone: 201-928-2400
Fax: 201-928-4028

Canada

Phone: 905-731-7678
Fax: 905-731-1401

www.sylvania.com



SYLVANIA, ECO, ECOLOGIC, QUICK 60+, QUICKSENSE and PROStart are registered trademarks of OSRAM SYLVANIA Inc.
SEE THE WORLD IN A NEW LIGHT is a registered trademark of OSRAM SYLVANIA Inc.
DULUX and QUICKTRONIC are registered trademarks of OSRAM AG.
Specifications subject to change without notice.