

Product Information Bulletin

DPY DPY M

- Single-ended
- 500 hour standard life
- 3,200 K color temperature
- High lumen efficacy
- G38 Mogul Bipost base
- Ceramic and Metal base options

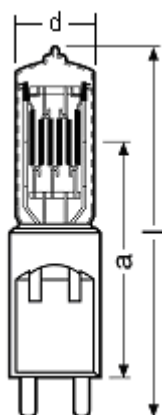


Fig. 1

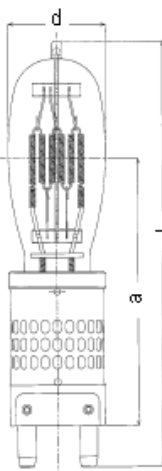


Fig. 2

Specification Information

Lamp Description	DPY	DPY M*
Product Code:	54647	54671

Electrical data:

Rated lamp wattage (power)	5,000	5,000
Rated lamp voltage	120	120

Photometric data:

Luminous flux (lm)	143,000	140,000
Color temperature (K)	3,200	3,200

Geometrical data:

Light center length / LCL (a) mm	165	165
Diameter (d) mm	54	60
Length l mm	max. 278	max. 268
Filament type	C-13	C-13

Other data:

Average service life (hrs.)	500	500
Base	G38 ceramic	G38 metal
Operating Position	s45	s45
Figure	1	2

* Metal Base

Application Information

Applications

- Stage & Studio
- Film & Television
- Event production

WARNING

This lamp emits ultraviolet (UV) radiation and operates at high internal pressure. **Before use** read the complete warning accompanying the product.

Disposal

When disposing of spent lamps, always consult federal, state, local and provincial hazardous waste disposal rules and regulations to ensure proper disposal.

Ordering Information

Lamp Description	NAED Code	Standard Case Qty.
DPY	54647	20/Case
DPY M*	54671	20/Case

* Metal Base