

[Return to search](#)

[Print Page](#)



Product Number: 64881
Order Abbreviation: MCP39PAR30LN/U/830/FL/ECO PB
General Description: 39 watt powerball ceramic arc tube, high CRI, ecologic, color consistent, medium base, open fixture rated, PAR30, clear metal halide lamp

Product Information


Abbrev. With Packaging Info.	MCP39PAR30LNU830FLECO PB1//SKU
ANSI Code	M130/O
Approx. Lumens (initial - vertical)	2300
Bulb	PAR30LN
Centerbeam Candlepower (cp)	8000
Diameter (in)	3.75
Diameter (mm)	95.25
Family Brand Name	Metalarc® Powerball
Fixture Requirement	O
Hot Restrike Time (min)	4-6
Maximum Base Temperature - Fahrenheit	410
Maximum Base Temperature - Celsius	210
Maximum Bulb Temperature - Fahrenheit	572
Maximum Bulb Temperature - Celsius	300
Maximum Overall Length - MOL (in)	4.76
Maximum Overall Length - MOL (mm)	121
Operating Position	Universal
Warm-up Time (min)	2-4

Additional Product Information

[Product Documents, Graphs, and Images](#)

[Packaging Information](#)

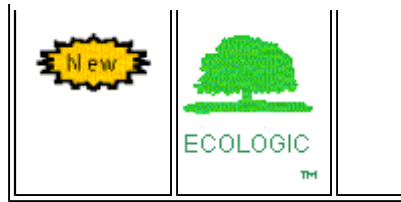

**Footnotes**

- Consult your OSRAM SYLVANIA Lighting Representative for compatible electronic operating systems.
- Use with 4000V pulse rated sockets only.
- Passes Federal TCLP test based on NEMA LL Series Standards. TCLP data available upon request. Disposal regulations may vary depending on location. Please check your local and state/provincial regulations.
- O = Lamps classified as O-type, comply with ANSI standard C78.389 for containment testing and may be used in open luminaries. See lamp warning.
- The circuit must include overcurrent protection (I.e. Thermally switched ballast).
- Lamp requires a nominal Open Circuit Voltage of 230V or higher. Without an ignitor in the circuit minimum OCV is 209Vrms.
- UV-Stop quartz

[Print Page](#)