



LED PAR38 Wet Location Spec Sheet

LED

50,000 Hours average rated life, 120Volts

Applications:

Ideal for outdoor PAR38 flood and spot light applications.

- + Outdoor Fixtures
- + Landscape Lights
- + Security Lights

Features and Benefits

- Energy Efficient: Up to 80% less energy than halogen alternatives.
- UL Wet Location Rated.
- Exceeds all industry performance requirements.
- Long life: 50,000 hours (lasts at least 15 times longer than Halogen alternative).
- Available in Flood(40°), Narrow Flood(25°), and Spot(15°).
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design.
- Excellent Color consistency and high color rendering (CRI).

Catalog Number

Notes


Type



Specifications

	PAR38
Input Line Voltage:	120 VAC
Input Power	19 W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	50,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C

PAR38

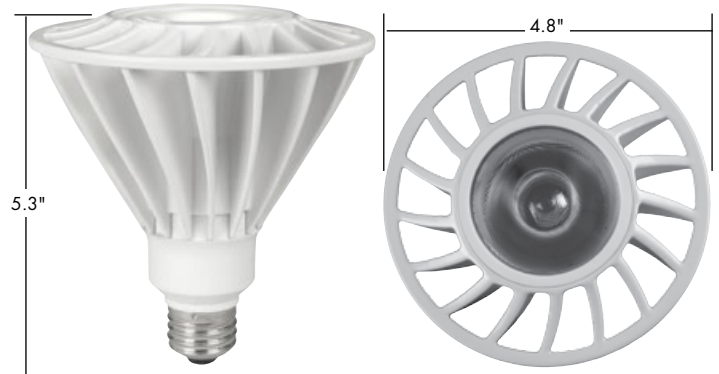

Warranties and Certificates	Item #	Voltage	Wattage	Replacement	Lumens	LPW	CBCP Est.	Beam Angle	CCT	CRI	STK/ATO	Case Quantity
5 YEAR WARRANTY 	Wet Location PAR 38											
	LED19E26P3827KSPWL	120	19	120W	1200	63.2	9220	15	2700K	82	STK	12
	LED19E26P3827KNFLWL	120	19	120W	1200	63.2	5763	25	2700K	82	STK	12
	LED19E26P3827KFLWL	120	19	120W	1200	63.2	2175	40	2700K	82	STK	12
	LED19E26P3830KSPWL	120	19	120W	1300	68.4	10022	15	3000K	82	STK	12
	LED19E26P3830KNFLWL	120	19	120W	1300	68.4	6264	25	3000K	82	STK	12
	LED19E26P3830KFLWL	120	19	120W	1300	68.4	2364	40	3000K	82	STK	12
	LED19E26P3841KSPWL	120	19	120W	1400	73.7	11224	15	4100K	82	STK	12
	LED19E26P3841KNFLWL	120	19	120W	1400	73.7	7015	25	4100K	82	STK	12
	LED19E26P3841KFLWL	120	19	120W	1400	73.7	2647	40	4100K	82	STK	12

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP, Inc. 2012/49343

