

LED Dimmable A-Lamps

25,000 Hours average rated life, 120Volts

Applications:


Ideal for dimmable A-lamp applications.

- + General Lighting
- + Chandeliers
- + Ceiling Fans
- + Wall Sconces



Features and Benefits

- Smooth, uniform dimming from 100% to 5%.
- Energy Efficient: Up to 80% less energy than standard incandescent.
- Exceeds all industry performance requirements for non-standard lamps.
- Long life: 25,000 hours (lasts at least 15 times longer than alternative)
- Very Durable: Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design.
- Excellent Color consistency and high color rendering (CRI).

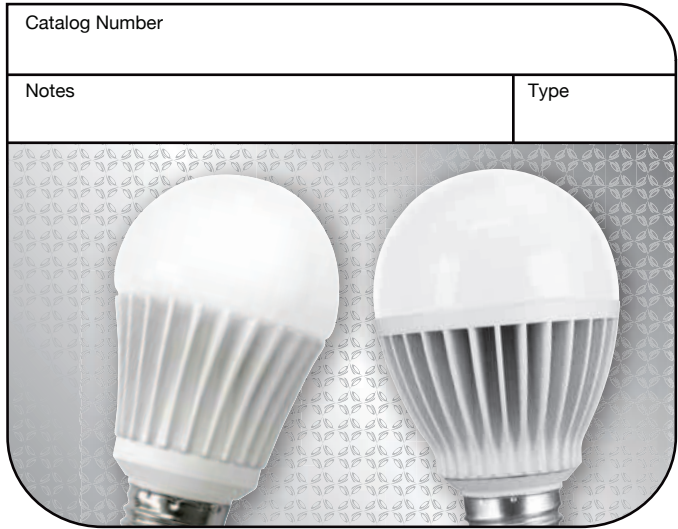

Specifications

| | |
|------------------------|------------|
| Input Line Voltage: | 120 VAC |
| Input Power | 8W/12W |
| Input Line Frequency | 50/60HZ |
| Lamp Life (Rated) | 25,000 hrs |
| Minimum Starting Temp | -20°C |
| Maximum Operating Temp | 40°C |

| Warranties and Certifications: | Item # | Description | Voltage | Wattage | Lumens | LPW | M.O.L. (inches) | Diameter (inches) | CCT | CRI | Case Quantity | STK/MTO |
|--------------------------------|----------------------------|-------------------------|---------|---------|--------|------|-----------------|-------------------|------|-----|---------------|---------|
| | 3 YEAR WARRANTY | 8W A19 Snow Cone | | | | | | | | | | |
| LED8E26A1927K | | LED 8W A-LAMP – 2700K | 120 | 8 | 450 | 56.3 | 4.3 | 2.4 | 2700 | 85 | 12 | STK |
| LED8E26A1930K | | LED 8W A-LAMP – 3000K | 120 | 8 | 450 | 56.3 | 4.3 | 2.4 | 3000 | 85 | 12 | STK |
| LED8E26A1941K | | LED 8W A-LAMP – 4100K | 120 | 8 | 477 | 59.6 | 4.3 | 2.4 | 4100 | 80 | 12 | STK |
| LED8E26A1950K | | LED 8W A-LAMP – 5000K | 120 | 8 | 500 | 62.5 | 4.3 | 2.4 | 5000 | 80 | 12 | STK |
| 12W A19 Snow Cone | | | | | | | | | | | | |
| LED12E26A1927K | | LED 12W A-LAMP – 2700K | 120 | 12 | 800 | 64.5 | 4.3 | 2.4 | 2700 | 85 | 12 | STK |
| LED12E26A1930K | | LED 12W A-LAMP – 3000K | 120 | 12 | 800 | 64.5 | 4.3 | 2.4 | 3000 | 85 | 12 | STK |
| LED12E26A1941K | | LED 12W A-LAMP – 4100K | 120 | 12 | 848 | 68.4 | 4.3 | 2.4 | 4100 | 80 | 12 | STK |
| LED12E26A1950K | | LED 12W A-LAMP – 5000K | 120 | 12 | 896 | 72.3 | 4.3 | 2.4 | 5000 | 80 | 12 | STK |