

model R-1


Decorative and economical unit with "EZ" install back plate feature has modern appearance and low maintenance.

FEATURES & SPECIFICATIONS

- Completely self-contained
- Fully Automatic Operation
- Compact, low profile design in neutral finish.
- Universal mounting plate with "EZ" Quick Connect for rapid labor saving installation.
- Push to test switch.
- 6-Volt, pure lead, maintenance-free battery.
- Environmentally-coated, solid state charger.
- Automatic, low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- Listed for damp location.
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing.
- Charge rate/power on LED indicator light.



DIMENSIONS

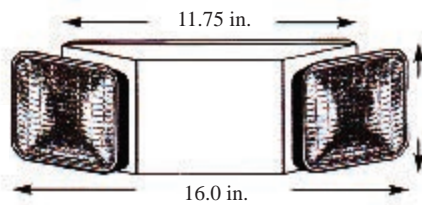

ORDERING INFORMATION

Catalog Model #	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage	Damp Location	Warranty
R-1	90 Min.	120V / 277V	2 x 5.4V	6V	Yes	Yes
R-1B (Black)	90 Min.	120V / 277V	2 x 5.4V	6V	Yes	Yes

Catalog Number:
Notes: