

## JC, JCD & JCV

- Only for Use in Approved Enclosed Halogen Fixtures
- Miniature 2-Pin Base - G5.3

Watts	Ushio Ordering Code	Ushio Lamp Description	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Burn Position	Bulb Finish	Fig No
			Dia (A)	MOL (B)	LCL (C)							
<b>Miniature 2-Pin Base – G5.3</b>												
30	1000254	DZA, JC10.8V-30W	11.5	51.0	27.0	C-6	600	3100	400	BD/Hor	Clear	1
50	1000837	JC14.5V-50WC	11.5	55.0	32.0	CBar6	1250	3200	100	BD/Hor	Clear	1
80	1000253	DYT, JC19V-80W*	11.5	51.0	27.0	CBar6	2600	3350	25	BD/Hor	Clear	1
100	1000649	GCC, JC12V-100WC5	11.5	57.0	32.0	CBar6	2900	3300	200	BD/Hor	Clear	1
100	1000255	DZB, JC12V-100W*	11.5	51.0	27.0	CBar6	3100	3400	50	BD/Hor	Clear	1
125	1000605	FSH, JCV120V-125WB	11.5	57.0	32.0	CC-8	2500	3000	200	BD/Hor	Clear	4
175	1000330	EML, JC24V-175W*	13.5	57.2	27.0	CBar6	5600	3200	125	BD/Hor	Clear	1
200	1000648	GCB, JCD30V-200WC1	11.5	57.0	32.0	CC-6	5300	3200	200	BD/Hor	Clear	2
250	1000453	EYH/FKT, JCD120V-250WB	22.0	63.5	36.5	CC-6	6050	3050	150	BD/Hor	Clear	3
250	1000647	GCA, JCV120V-250WC	11.5	57.0	32.0	CC-8	5880	3200	200	BD/Hor	Clear	4
300	1000899	JCD120V-300WCP	22.0	62.0	37.0	CC-6	7350	3200	100	BD/Hor	Clear	3
360	1000442	EYB, JCD82V-360W	11.5	57.0	31.8	CC-8	10000	3300	75	BD/Hor	Clear	2
360	1000443	EYB-5, JCD86V-360WS	11.5	57.0	31.8	CC-8	10000	3300	75	BD/Hor	Clear	2
500	1000476	FBG/FBD, JCD120V-500WCP	22.0	76.0	44.5	CC-6	13200	3200	50	BD/Hor	Clear	3
600	1000246	DYH, JCD120V-600WCP	22.0	63.0	36.5	CC-6	17000	3200	75	BD/Hor	Clear	3
650	1000225	DVY, JCD120V-650WSP	22.0	63.0	36.5	CC-6	20000	3400	25	BD/Hor	Clear	3
650	1000247	DYJ, JCD230V-650WSP*	24.0	63.5	42.9	2CC-8	20000	3400	20	BD/Hor	Clear	5

\* Special Order Item

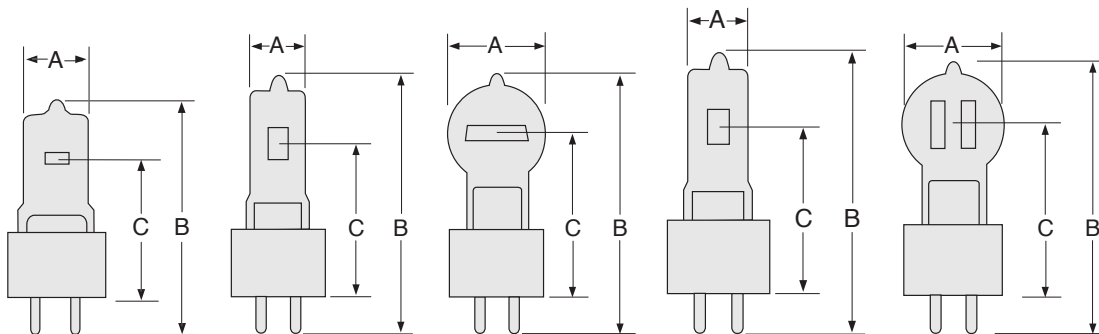


Fig.1

Fig.2

Fig.3

Fig.4

Fig.5