NTERMATIC



IOS-DOV-WH

PIR Occupancy / Vacancy Sensor Switch

for 120V

Features:

- · Zero crossing function increases longevity
- Automatic ON/OFF Control
- Push button ON/OFF
- Time delay OFF ranging from 15 seconds to 30 minutes
- Passive Infrared technology
- Adjustable sensitivity settings
- Standard decorator wall plate included
- ISO9001 Registered manufacturing facility
- Meets California Title 24 Requirements
- UL/cUL Listed device
- Five Year Limited Warranty








Ideal for:
Offices, Copy Rooms, Break Rooms
Storage Closets, Small Restrooms,
Small Conference Rooms,
Maintenance Closets










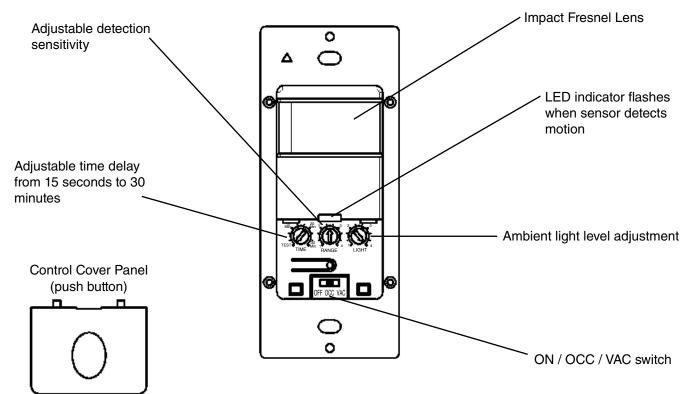

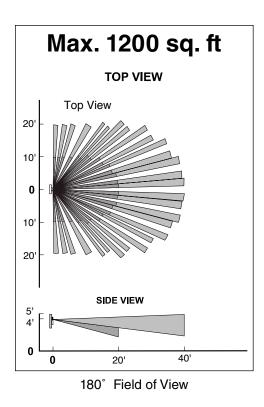

Part #	IOS-DOV				
Desc	Single Pole, Decorator Wall Switch PIR Occupancy / Vacancy Sensor for 120V				
Rating	Incandescent / Tungsten: 800W-120VAC Resistive load: 800W-120VAC Fluorescent / Ballast: 800VA-120VAC Motor: 1/4HP-120VAC Time Delay: 15 Sec to 30 Min Light Level: 30 LuxDaylight Operation Temperature: 32°F131°F / 0-55°C No minimum Load required. Can be used with electronic fluorescent ballasts				
Coverage	180°, Max 1200sq. ft				
Color	White, Ivory				
Five Year Limited Warranty					

Model Ordering Info:

Series	Style	 Туре	_	Finish
IOS Intermatic Occupancy Sensor	D Decorator Plate	OV Occupancy/ Vancacy		WH White
				IV