

PERFECT FOR LIGHTING:

- Archways
- Staircases
- Brighter Bulbs
- Windows
- Railings
- Steady Burning or Flashing
- Roof Lines
- Pre-Tested, Warranted to Light

USER SERVICING INSTRUCTIONS

To replace burned-out bulbs, follow directions below:

1. Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on cord.



2. Pull lamp and plastic base straight out of lampholder.

3. Remove base of burned out bulb by straightening wires and gently pulling bulb out.



4. If your replacement bulb must be removed from its base, follow Step 3.

5. Thread wires of replacement bulb through holes in old base with one wire in each hole.




6. After bulb is fully inserted into base, bend wires up, one on each side, like other bulbs in your set so that the wires will touch the contacts inside the sockets.

Replace lamp with only 2.5 Volt lamp (provided with product).

IMPORTANT! If the set does not light, gently push each bulb firmly into the socket -- they sometimes become loose in transit.

Safety Plug With Replaceable Fuses

- Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on cord.
- Slide open fuse access cover on top of attachment plug towards blades.
- Remove fuse carefully.
- Risk of fire. Replace fuse only with 3 AMP, 125 Volt fuse (provided with product).
- Slide closed the fuse access cover on top of attachment plug, or push cover closed so that all tabs latch.
- Risk of fire. Do not replace attachment plug. Contains a safety device (fuse) that should not be removed. Discard product if the attachment plug is damaged.




BLINKING FEATURE: Each 150 light set consists of 3 independent circuits of 50 lights. Each circuit can be made to blink by replacing 1 of the bulbs in that row with one of the spare blinking bulbs which is the clear bulbs with the red tip. There are 5 spare bulbs included with this set -- 3 blinking bulbs (the clear with the red tip) and 2 steady burning bulbs.

FOR INDOOR AND OUTDOOR USE 120 V 60 Hz AC

CAUTION:

- To reduce the likelihood of excessive heat and possible damage, use only decorative lamp accessories packaged with this product.
- Always unplug this product before installing or replacing lamps.
- To reduce the risk of fire and electric shock: Do not install on trees having needs, leaves or branch coverings of metal or materials which look like metal.
- To reduce the risk of fire and electrical shock: Do not mount or support strings in a manner that can cut or damage wire insulation.

This lighting string is rated 61.2 Watts (0.51 AMPS), do not overload. Connect other lighting strings or decorative outfits end-to-end up to a maximum of 216 Watts (1.80 AMPS) total.

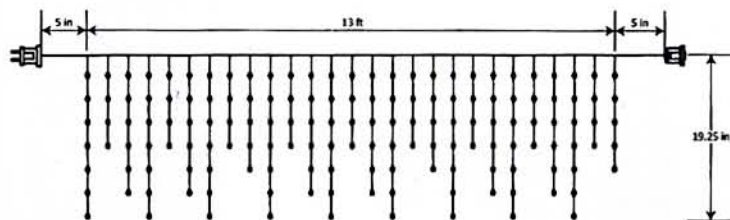

Contains two 150 light strings. Total lighted length 26'
Measurements are approximate as light set wires are made and twisted by hand.

ITEM NO. 11371



MADE IN CHINA