

Model Number:

Type:

Job:

Approvals:

“The Option”

LED RETROFIT KIT

The Option LED Retrofit Kit reduces exit sign energy consumption up to 97% and eliminates maintenance expense providing a bright, uniform look.

RT1 STANDARD FEATURES

- Up to 97% energy savings
- Specify 120 or 277 Volt
- Direct Wire or Socket Ready (120V)
- High intensity red, green, or white LEDs
- Bright, uniform face illumination
- Consumes only 1.1 watt of power
- No visible LEDs. Surge protected parallel circuitry
- 80 to 100 year expected life
- Maintenance-free
- 5 year warranty
- Retrofit Lens Kit available separately

1. Remove Existing Bulbs



2. Install Option LED Retrofit Kit



3. Replace Exit Face



“The Option 2”

RETROFIT BULB

LED Retrofit Bulbs easily retrofit most incandescent exit signs in minutes. Install and forget it.

RT2 STANDARD FEATURES

- 2 LED Retrofit Bulbs with candelabra base and (2) each intermediate and bayonet adapters included in each package
- Direct wire available
- 120 Volt only
- ETL tested to only 1.2 watts per bulb
- Available in red and green LEDs
- Uniform letter illumination (no hot spots)
- Non-breakable housing
- 5 1/8" H x 1 5/8" W
- Add 1/8" to height when using adapter
- 5 year warranty




SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

“The Option” LED RETROFIT KIT


DIMENSIONS

Red: 6 1/4" L x 7/8" W x 3/4" H

Green: 5 1/4" L x 5/8" W x 1 1/16" H

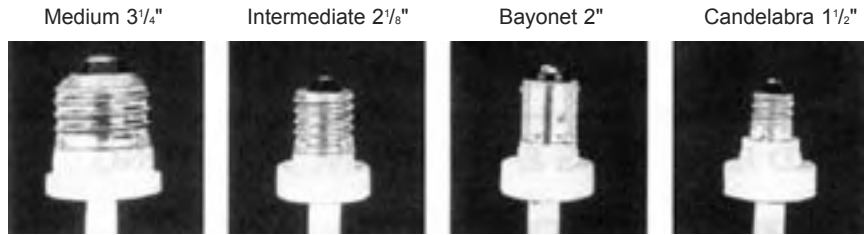

ORDERING INFORMATION

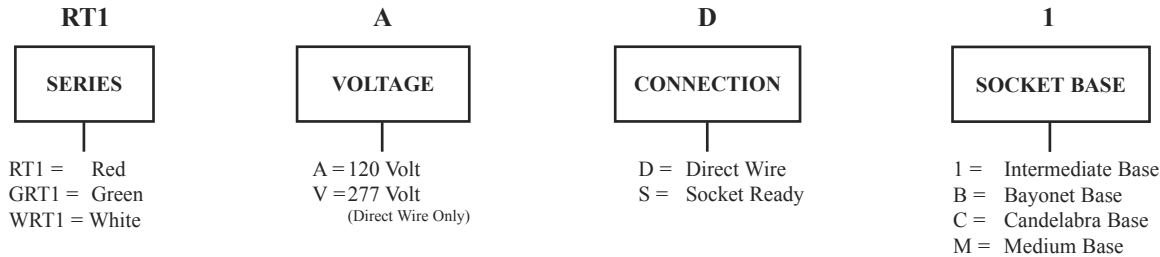

To order Retrofit Lens Kits: Green Retrofit Kits come standard with Retrofit Lens.
Red Kit = RL/Kit: includes 2 red diffuser lenses and reflector.

“The Option 2” RETROFIT BULB

DIMENSIONS


5 1/8" H x 1 5/8" W

Add 1/8" to height when using socket adapters.

WARRANTY

Any component that fails due to manufacturer's defect is guaranteed for 5 years. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. And Exitronix reserves the right to charge for such repairs if deemed necessary.

ORDERING INFORMATION

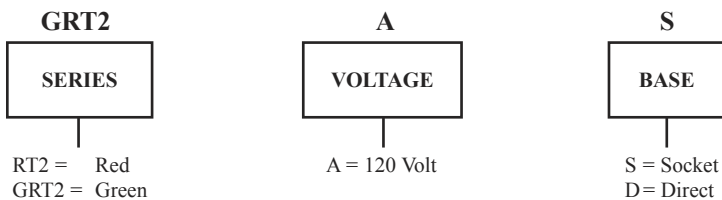

YOUR LOCAL REPRESENTATIVE IS:

EXITRONIX™

A DIVISION OF THE

BARRON LIGHTING GROUP

1911 W. Parkside Lane • Phoenix, AZ 85027

(800) 533-3948 • Fax: (623) 580-8948

www.exitronix.com • www.barronltg.com