



Commercial Products & Solutions

[SITE SEARCH](#) > [HOME](#) > [PRODUCTS](#) > [EDUCATION / RESOURCES](#) > [LIGHTING APPLICATIONS](#)

[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)

[Products](#) > 12207


12207 – F35WW/U/6/WM

GE Warm White Watt-Miser® Mod-U-line® T12



- Saves energy compared to standard wattage lamps

- Reduced Wattage**
 Meets Federal Minimum Efficiency Standards
 Energy Savings



[View Larger](#)

GENERAL CHARACTERISTICS

Lamp type	Linear Fluorescent - U-Shaped
Bulb	T12
Base	Medium Bi-Pin (G13)
Wattage	35
Voltage	78
Rated Life	14000 hrs
Bulb Material	Soda lime
Starting Temperature (MIN)	16 °C (61 °F)
LEED-EB MR Credit	997 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	2350
Mean Lumens	2150
Nominal Initial Lumens per Watt	67
Color Temperature	3000 K
Color Rendering Index (CRI)	52

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage (rapid start) (MAX)	330 V
Open Circuit Voltage (rapid start) Min @ Temperature	256 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS


Maximum Overall Length (MOL)	22.6000 in (574.0 mm)
Minimum Overall Length	22.2500 in (565.1 mm)
Nominal Length	22.500 in (571.5 mm)
Bulb Diameter (DIA)	1.500 in (38.1 mm)
Bulb Diameter in Bend (MIN)	1.330 in (33.7 mm)

ADDITIONAL RESOURCES


- [Catalogs](#)
- [Testimonials](#)
- [MSDS \(Material Safety Data Sheets\)](#)
- [Disposal Policies & Recycling Information](#)

GRAPHS & CHARTS

Lamp Mortality

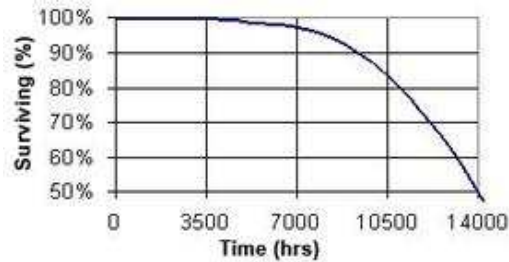

Lumen Maintenance

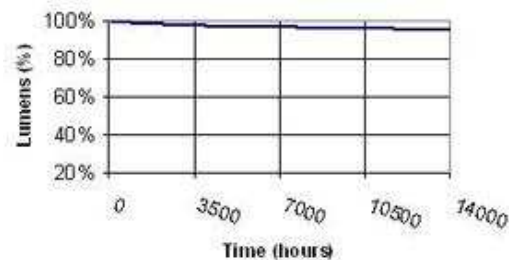

Bulb Diameter in Bend (MAX)	1.630 in (41.4 mm)
Bulb Diameter in Legs (MIN)	1.410 in (35.8 mm)
Bulb Diameter in Legs (MAX)	1.590 in (40.3 mm)
Base Face to Top of Lamp	22.250 in (565.1 mm)
Lamp Legs Center to Center Length	6.000 in (152.4 mm)

PRODUCT INFORMATION

Product Code	12207
Description	F35WW/U/6/WM
Standard Package	Case
Standard Package GTIN	10043168122075
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168122078

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
72110	GE140RS120-DIY	1	0.55	0.88
97498	GE240RS120	2	98.0	0.85
97499	GE240RS120-DIY	2	98.0	0.85
24107	GE-240-RS-MV-N	1	99.0	0.87
24773	GE240RS-MV-N-DIY	1	99.0	0.87
24109	GE-340-RS-MV-N	2	99.0	0.87

⚠ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)