


PAR 38

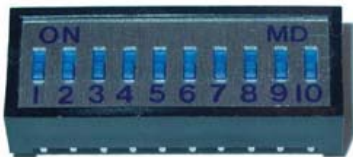

Dip Switch.

General Description:

The Led Par 38 Light has infinite RGB color mixing capability and has 75 high power 10mm LED's. It is ideal for stage and indoor architectural applications and offers the following features. The Par 38 can be controlled using the Dip Switch panel located on the back or DMX controlled.

Specification:

Size:	3.7" x 6" x 5.11"
Weight:	5 lbs.
Power Output:	AC 120V/240V, 60HZ/50HZ
Wattage:	Wattage 9W
LED's:	75 RGB
Sockets:	3 pin female XLR socket and 3 pin male XLR socket
Microphone:	Built-in
Life Span:	>=80000 hours.

Dip Switch Chart

Mode	Dip 1	Dip2	Dip3	Dip4	Dip5	Dip6	Dip7	Dip8	Dip9	Dip10	Function
Auto Run (Master projector)	0	0	0	0	0	0	X	X	0	0	Color changing and color fading Select running speed via dip7, dip 8
Sound Activated (Master projector)	X	X	X	X	X	X	0	0	0	0	Static color and flash Select static color via dip1~dip3 (separately for R.G.B) select flash speed via Dip4~dip6
DMX	X	X	X	X	X	X	X	X	X	1	DMX mode CH1→R CH2→G CH3→B CH4→Dimmer CH5→flash
Other	1	0	0	0	0	0	0	0	0	1	1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode
	0	0	0	0	0	0	0	0	0	1	Black out