




# InstaBright Lamp Specifications


## SpringLamp® Compact Fluorescent

- NPF, 6,000 Hours average rated life


Item #	Lamp Type	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent
1G2511IB	G25 Globe	11	40	450	.18A	4.7	3.1	5X
1G3014IB	G30 Globe	14	50	600	.23A	5.0	3.6	5X
1R3011IB	R30 Flood	11	50	400	.18A	5.5	3.7	4X
2R3014IB	R30 Flood	14	65	600	.23A	5.1	3.7	4X
1R4011IB	R40 Flood	11	50	400	.18A	6.0	4.7	4X
1R4014IB	R40 Flood	14	65	600	.23A	5.9	4.7	4X
11311IB	A-Lamp	11	40	400	.18A	4.8	2.4	5X
21314IB	A-Lamp	14	50	500	.23A	4.4	2.3	5X




G25 Globe

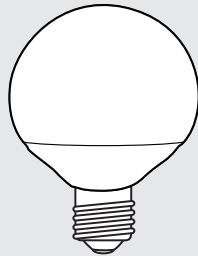


G30 Globe

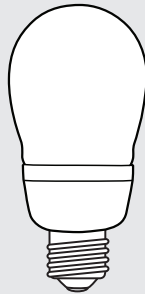

A Lamp

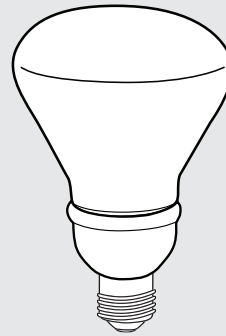


R30 Flood

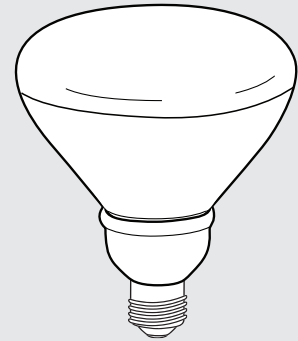

R40 Flood

### Applications:

Perfect for:

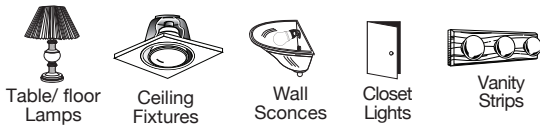

### Special Application Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K), 6500°K (65K)

### Features and Benefits:

- Long life CFL, 6,000 hour average rated life
- NEW Amalgam technology- provides cooler operating temperatures for consistent performance in any position
- No lead glass – Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base
- Replace less often, ideal for hard to reach places
- U.L. Listed for wet locations – use indoors or outdoors
- 12 Month Warranty
- Quickstart technology – fast run up time

### Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	6,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	82
Min. Starting Temperature -----	-20 ° F
Max. Operating Temperature --	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency ---	45 KHZ
Lamp Current Crest Factor ----	< 1.60
Max. Open Circuit Voltage -----	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%



12 MONTH WARRANTY