



Mercury Vapor 50W Med BD17 CO

Product family description
Long life high intensity discharge mercury lamps.

Features/Benefits

- 24,000 hour rated average life for reduced cost of lamp maintenance.
- Wide range of lamp types for indoor and outdoor use.
- Universal operating position.

Applications

- Ideal for sign lighting, security lighting and roadway lighting.

Notes

- Rated average life is the life obtained, on the average, from large representative groups of lamps in laboratory tests under controlled conditions at 10 or more operating hours per start. It is based on survival of at least 50% of the lamps and allows for individual lamps or groups of lamps to vary considerably from the average. For lamps with a rated average life of 24,000 hours, life is based on survival of 67% of the lamps. (351)
- Approximate lumen values listed are for vertical operation of the lamp. (352)
- Means Lumens is the approximate lumen output at 40% of lamp rated average life. (353)
- Heat resisting glass bulb.

Product data	
Product Number	356642
Full product name	Mercury Vapor 50W Med BD17 CO
Ordering Code	H46DL-40-50/DX
Pack type	1 Sleeve Open End
Pieces per Sku	1
Skus/Case	12
Pack UPC	046677356644
EAN2US	
Case Bar Code	50046677356649
Successor Product number	
Base	Medium [Single Contact Medium Screw]
Base Information	Brass [Brass Base]


Product data	
Bulb	BD17
Bulb Material	Hard Glass
Bulb Finish	Coated
Operating Position	Universal [Any or Universal (U)]
Packing Type	1SL [1 Sleeve Open End]
Packing Configuration	12
Ordering Code	H46DL-40-50/DX
Pack UPC	046677356644
Case Bar Code	50046677356649
Rated Avg. Life	24000 hr
ANSI Code HID	H46
Watts	50W
Lamp Voltage	95 V
Color Rendering Index	45 Ra8
Color Temperature	3200 K
Initial Lumens	1800 Lm
Design Mean Lumens	1260 Lm
Light Center Length L	3.125 in
Max Overall Length (MOL) - C	5.125 in
Diameter D	2.125 in
Product Number	356642




Mercury Vapor BD17 CO



Base Medium



Mercury Vapor BD17

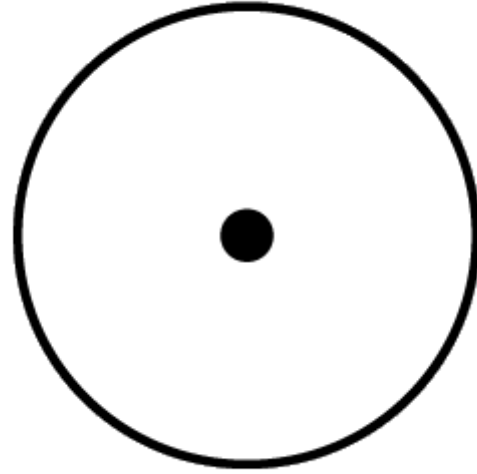

Operating Position Universal

