

RAB LIGHTING GT500



JOB NAME: _____
 DATE: _____
 TYPE: _____

DESCRIPTION

Gotcha Sensor with 110° view, surge protection, 500 watt switching capacity, auto test logic and manual override.

SPECIFICATIONS

UL Listing

Suitable for wet locations.

Voltage

120 volts AC 60 Hz.

Power Consumption

1 watt

Time Adjustment

10 seconds to 5 minutes

Surge Protection

Withstands up to 6000 volts

Photoelectric Control

Deactivates lights during daylight

Detector Sensitivity

Adjustable from 100% to 50%

Wall Switch Manual Override

Two flip logic prevents activation by momentary power outages. Override resets to auto after 6 hours or at dawn. No extra wiring needed.

Sensor Housing

Made of tough, corrosion resistant polycarbonate

Floodlights

Made of tough, corrosion-resistant polycarbonate. For extra or replacement floodlights, order cat# TUFFY in your choice of color. Accepts PAR-38 lamps, medium base, 150 watts max. Lamps not included.

Detection

110° view

Switching Capacity


500 watts Incandescent @120 volts, 5 amps
 250 watts Fluorescent

Patents


RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws.

Color
 Black
Weight
 0.65

DIMENSIONS

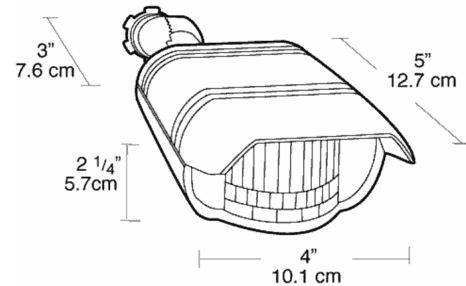

DETECTION PATTERN

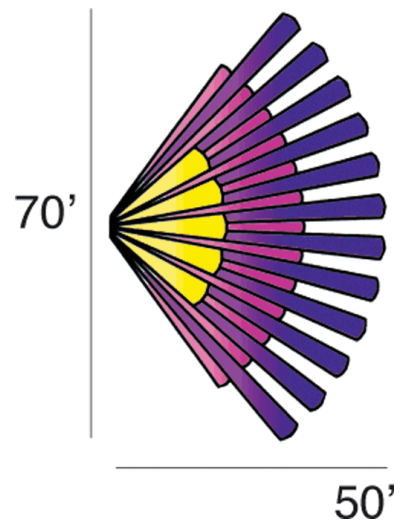

Note: Specifications may change without notice