

METALARC® PULSE START

High Lumen Maintenance, Reduced Color Shift, Premium Metal Halide Lamps



SYLVANIA METALARC® PULSE START 175, 200, 250, 320, 320/350, 350/400, 400, 750 and 1000 watt lamps provide less color shift, high lumen maintenance and a long life. Their premium performance provides opportunities for higher maintained illumination levels and substantial energy savings. Additional increases in optical efficiency may be gained by fixture designs using compact outer jacket configurations. All high wattage pulse start lamps, 200W-1000W, are lead free.

SYLVANIA METALARC PULSE START lamps combine new metal halide lamp technology with proven ignitor technology. The result is a more transparent arc tube over life yielding less color shift and high lumen maintenance.

Key Features & Benefits

METALARC PULSE START Lamps

- Excellent lumen maintenance
- Quicker hot restrike*
- Long average rated life

175 Watt Pulse Start

- 50% longer life than standard 175 watt
- 21% higher initial lumens and >50% higher mean lumens than standard product
- Available in universal operating position

200 Watt Pulse Start

- 20% energy savings over 250 watt lamp
- Available with Compact ET23.5 version for higher luminaire efficiency

250 Watt Pulse Start

- 20,000 hour life rating for MS types (doubles the life of standard 250 watt)
- MP type has 50% longer life than standard 250 watt
- Available with PRO-TECH® design for open fixture use
- Available in universal operating position

320 Watt Pulse Start

- 100 initial lumens per watt for clear lamps
- May be operated base-up through horizontal
- Compact BT28 size allows higher luminaire efficiency

320/350 Watt Pulse Start

- Available in PRO-TECH design for open fixture use
- Lamp can be operated on 320 or 350 watt ballast

350/400 Watt Pulse Start

- Incorporates PRO-TECH design for open fixture use
- Lamp can be operated on 350 or 400 watt ballast

400 Watt Pulse Start

- 24% higher mean lumens than the M400/U and 16% higher mean lumens than the MS400/BU-ONLY
- Less color shift over lamp life*
- Available with Compact BT28 version for higher luminaire efficiency
- Available in universal operating position

750 Watt Pulse Start

- 25% energy savings over standard 1000 watt metal halide
- Compact BT37 outer jacket

1000 Watt Pulse Start

- Compact BT37 outer jacket
- Available in universal operating position

*Compared to standard metal halide lamps.

Product Offering

Product	Lamp Finish	Fixture Type
M175/PS/U	Clear	Enclosed fixture only
MS175/PS/BU-ONLY	Clear & Coated	Enclosed fixture only
MS175/PS/BU-ONLY/MED	Clear & Coated	Enclosed fixture only
MS200/PS/BU-ONLY/ET23.5	Clear	Enclosed fixture only
MS200/PS/BU-ONLY	Clear & Coated	Enclosed fixture only
MP250/PS/BU-ONLY	Clear & Coated	Open or enclosed
MS250/PS/BU-ONLY	Clear & Coated	Enclosed fixture only
M250/PS/U	Clear	Enclosed fixture only
MS320/PS/BU-HOR	Clear & Coated	Enclosed fixture only

*See Notes Section for more fixture information

Product	Lamp Finish	Fixture Type
MP320/350/PS/BU-ONLY/BT28	Clear & Coated	Open or enclosed
MP350/400/PS/BU-ONLY	Clear & Coated	Open or enclosed
MS400/PS/BU-ONLY/BT28	Clear	Enclosed fixture only
MS400/PS/BU-ONLY/BT28	Clear	Enclosed fixture only
MS400/PS/BU-ONLY	Clear & Coated	Open or enclosed*
M400/PS/U/BT28	Clear	Enclosed fixture only
M400/PS/U	Clear	Enclosed fixture only
MS750/PS/BU-HOR/BT37	Clear & Coated	Enclosed fixture only
M1000/U/PS/BT37	Clear	Enclosed fixture only



Application Information

Applications

Ambient lighting: Industrial and Commercial
 Parking lots
 Canopy lighting
 Security lighting
 Flood lighting

Application Notes

Operating orientation: Base up only or base down only within 15° of vertical. 320W and 750W lamps may be operated base-up through horizontal. M250/PS/U, M400/PS/U, M400/PS/U/BT28 and M1000/U/PS/BT37 may be operated in any operating position.

Socket Information

Lamps operate in standard mogul HID sockets rated to withstand 4000 volt pulses. Exclusionary mogul sockets are recommended for the METALARC PRO-TECH (MP) versions.

Ballast Information

All lamps will operate on ANSI Pulse Start ballasts with ignitors for metal halide lamps as noted in the Ordering and Specification Information section (page 3 of this PIB).

Fixtures

Consult your local fixture agent for available fixtures.

Lamp Comparison

Lamp Type	Initial Lumens	Mean Lumens	Hot Restrike	Average Rated Life (hrs.)
400 Watt Pulse Start MS400/PS/BU-ONLY	42,000	31,000	5 to 7 min.	20,000
400 Watt SUPER METALARC MS400/BU-ONLY	42,000	26,000	7 to 12 min.	20,000
400 Watt Standard	36,000	23,500	7 to 12 min.	20,000

- 16% higher mean lumens than the 400 Watt SUPER METALARC lamps
- 24% higher mean lumens than the standard 400 Watt METALARC lamps
- 50% longer average rated life when operated on a 120-hour cycle — average rated life of 30,000 hours

Installed Savings

Lamp Type	Watts	Number of Lamps	Energy Cost per Year	Savings per Year
M400/U	400	500	\$128,240	\$0
MP350/400/PS/BU-ONLY	350	500	\$112,000	\$16,240

- Lowers energy costs
- * 5600 hours/year, \$0.1 kWh; 458W per fixture for the 400W lamp, 400W per fixture for the 350W lamp.

Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	Date

Ordering Information


Item Number	Ordering Abbreviation	Watts	Finish	Bulb	Base	ANSI ² Code	Average Rated Life (hrs.)	Initial Lumens	Mean Lumens	CRI	Color Temp
64171	MS175/PS/BU-ONLY/MED	175	Clear	ED17	E26	M152/E, M137/E ⁵	15,000	17,500	12,800	65	4000K
64170	MS175/C/PS/BU-ONLY/MED	175	Coated	ED17	E26	M152/E, M137/E ⁵	15,000	16,600	12,500	70	3700K
64319	M175/PS/U	175	Clear	BT28	E39	M152/E, M137/E ⁵	12,000V 9000H	14,400V 12,800H	10,000V 8300H	65	4000K
64815	MS175/PS/BU-ONLY ⁴	175	Clear	ED28	E39	M152/E, M137/E ⁵	15,000	17,500	12,800	65	4000K
64816	MS175/C/PS/BU-ONLY ⁴	175	Coated	ED28	E39	M152/E, M137/E ⁵	15,000	16,600	12,500	70	3700K
64837	MS200/PS/BU-ONLY/ET23.5	200	Clear	ET23.5	E39	M136/E	15,000	19,000	13,300	65	4200K
64838	MS200/PS/BU-ONLY ⁴	200	Clear	BT28	E39	M136/E ⁵	15,000	19,000	13,500	65	4000K
64839	MS200/C/PS/BU-ONLY ⁴	200	Coated	BT28	E39	M136/E ⁵	15,000	18,000	12,800	70	3800K
64789	MP250/PS/BU-ONLY	250	Clear	BT28	EX39	M153/O, M138/O ⁵	15,000	22,500	17,000	65	4000K
64790	MP250/C/PS/BU-ONLY	250	Coated	BT28	EX39	M153/O, M138/O ⁵	15,000	21,000	16,000	70	4000K
64578	MS250/PS/BU-ONLY	250	Clear	BT28	E39	M153/E, M138/E ⁵	20,000	23,000	17,000	65	4200K
64617	MS250/C/PS/BU-ONLY	250	Coated	BT28	E39	M153/E, M138/E ⁵	20,000	21,500	15,500	70	3600K
64320	M250/PS/U	250	Clear	BT28	E39	M153/E, M138/E ⁵	15,000V 12,000H	22,000V 19,000H	15,400V 14,000H	65	3800K
64507	MS320/PS/BU-HOR	320	Clear	BT28	E39	M154/E, M132/E ⁵	20,000V 15,000H	30,000V 28,000H	21,000V 19,700H	65	4300K
64646	MS320/C/PS/BU-HOR	320	Coated	BT28	E39	M154/E, M132/E ⁵	20,000V 15,000H	30,000V 28,000H	19,700V 18,400H	70	3900K
64391	MP320/350/PS/BU-ONLY/BT28	320 350	Clear	BT28	EX39	M154/E, M132/O ⁵ M131/O ⁵	20,000 20,000	28,600 33,500	21,000 24,000	65 65	3800K 3600K
64349	MP320/350/C/PS/BU-ONLY/BT28	320 350	Coated	BT28	EX39	M154/O, M132/O ⁵ M131/O ⁵	20,000 20,000	27,700 32,000	19,000 22,000	70 70	3600K 3600K
64769	MP350/400/PS/BU-ONLY	350 400	Clear	BT37	EX39	M131/O ⁵ M155/O, M135/O ⁵	20,000 20,000	33,000 40,000	24,500 29,500	65 65	3700K 3500K
64770	MP350/400/C/PS/BU-ONLY	350 400	Coated	BT37	EX39	M131/O ⁵ M155/O, M135/O ⁵	20,000 20,000	32,000 39,000	23,000 28,000	70 70	3500K 3300K
64189	MS400/PS/BU-ONLY/BT28	400	Clear	BT28	E39	M155/E, M135/E ⁵	20,000	40,000	32,500	65	4100K
64191	MS400/PS/BU-ONLY/BT28	400	Clear	BT28	E39	M155/E, M135/E ⁵	20,000	40,000	32,500	65	4100K
64525	MS400/PS/BU-ONLY	400	Clear	BT37	E39	M155/S, M135/S ⁵	30,000 ¹	42,000	31,000 ¹	65	4000K
64527	MS400/C/PS/BU-ONLY	400	Coated	BT37	E39	M155/S, M135/S ⁵	30,000 ¹	42,000	29,000 ¹	70	3600K
64188	M400/PS/U/BT28	400	Clear	BT28	E39	M155/E, M135/E ⁵	20,000V 15,000H	36,000V 31,000H	25,500V 22,400H	65	4000K
64321	M400/PS/U	400	Clear	BT37	E39	M155/E, M135/E ⁵	20,000V 15,000H	36,000V 31,000H	25,500V 22,400H	65	4000K
64787	MS750/PS/BU-HOR/BT37	750	Clear	BT37	E39	M149/E ³	16,000V 12,000H	78,000V 68,000H	67,000V 56,000H	65	4000K
64822	MS750/C/PS/BU-HOR/BT37	750	Coated	BT37	E39	M149/E ³	16,000V 12,000H	75,000V 65,000H	63,000V 53,000H	70	3700K
64351	M1000/U/PS/BT37	1000	Clear	BT37	E39	M141/E	15,000V 9000H	110,000V 107,800H	96,000V 86,300H	65	3800K

Notes:


- Based on 10 hrs/start operating cycle. On 120 hrs/start, life rating increases from 20,000 to 30,000 hours and mean lumen point is at 12,000 hrs.
 - For lamps with 2 ANSI codes, the first is the new ANSI code and the second is the original code.
 - When operated on ballasts having a sustaining voltage less than 310V, lamp life may be significantly reduced.
 - Contact your local OSRAM SYLVANIA sales representative for availability.
 - When operated on ballasts having a sustaining voltage less than 270V, lamp life may be significantly reduced.
 - For lamp wattages of 360W and greater, it is recommended that lampholders with nickel-plated copper alloy center contacts (with spring) should be used rather than electrical contacts made of stainless steel.
- E = Lamps classified as E-type are to be used ONLY in suitably enclosed luminaires. See lamp warning.
O = Lamps classified as O-type, comply with ANSI standard C78.389 for containment testing and may be used in open luminaires. See lamp warning.
S = When operated within 15 degrees of vertical, this lamp may be operated in an open luminaire provided the installation is not near people or flammable or combustible material, otherwise it must be operated in a suitably enclosed luminaire. See lamp warning.

Technical Information


Typical Mortality Curve

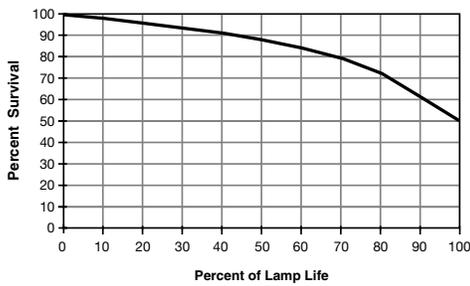

Typical Lumen Depreciation

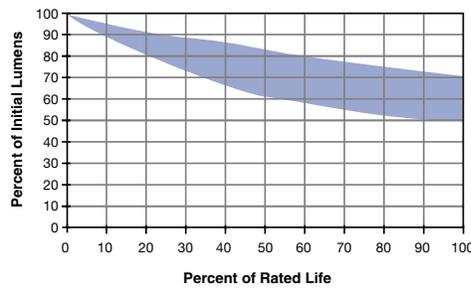


Typical Spectral Power Distribution

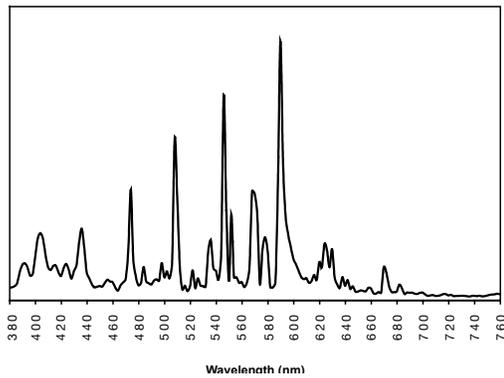

Lamp Dimensions

Ordering Abbreviation	(A) MOL	(B) LCL	(C) Bulb Diameter
ED17	5"	3"	2-1/8"
ET23.5	6-29/32"	4-1/2"	2-15/16"
BT28/ED28	8-5/16"	5"	3-1/2"
BT37	11-1/2"	7"	4-5/8"

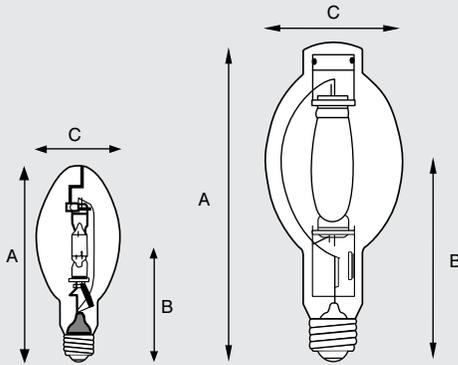

Ordering Guide

MS	320	/	PS	/	BU-ONLY
M = METALARC metal halide	Wattage: 175, 200, 250,		Pulse Start		BU-ONLY = Base up only
S = SUPER high output	320, 320/350,				U = Universal
P = METALARC PRO-TECH open fixture rated	350/400, 400, 750 or 1000 watts				BD-ONLY = Base down only
					BU-HOR = Base up - Horizontal

Ultraviolet Radiation Exposure

WARNING! THESE LAMPS CAN CAUSE SERIOUS SKIN BURN AND EYE INFLAMMATION FROM SHORT-WAVE ULTRAVIOLET RADIATION IF THE OUTER ENVELOPE (GLASS BULB) OF THE LAMP IS BROKEN OR PUNCTURED. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is punctured or broken are commercially available from OSRAM SYLVANIA Products Inc. THESE LAMPS CONFORM TO FEDERAL STANDARD 21 CFR 1040.30 in the U.S. AND SOR/80-381 in Canada.

Sample Specification

400 Watt: Lamp(s) shall be (a) 400W METALARC PULSE START lamp(s) exhibiting initial lumens of 42,000 with a 74% mean lumen maintenance and capable of operating on a M155/M135 ballast. Lamp construction shall include a lead-free welded base with a maximum temperature of 250°C.

OSRAM SYLVANIA
National Customer
Service and Sales Center
18725 N. Union Street
Westfield, IN 46074 USA

Industrial Commercial
Phone: 1-800-255-5042
Fax: 1-800-255-5043

National Accounts
Phone: 1-800-562-4671
Fax: 1-800-562-4674

OEM/Special Markets
Phone: 1-800-762-7191
Fax: 1-800-762-7192

Display/Optic
Phone: 1-888-677-2627
Fax: 1-800-762-7192

In Canada
OSRAM SYLVANIA LTD
Headquarters
2001 Drew Road
Mississauga, ON L5S 1S4

Industrial Commercial
Phone: 1-800-263-2852
Fax: 1-800-667-6772

Special Markets
Phone: 1-800-265-2852
Fax: 1-800-667-6772

Visit our website: www.sylvania.com