




GE
Lighting

12537 - F96T8/SP35/HO

GE Starcoat® T8

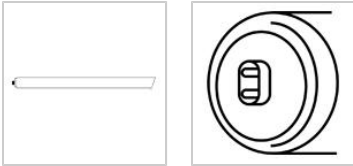

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS


Spectral Power Distribution

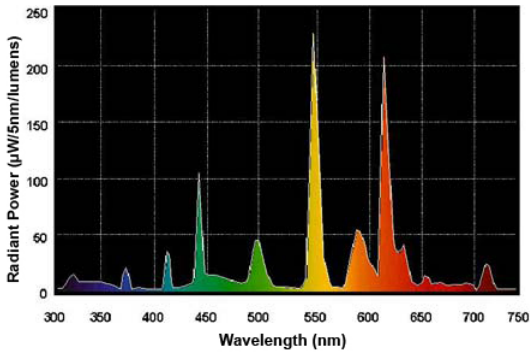

Lumen Maintenance

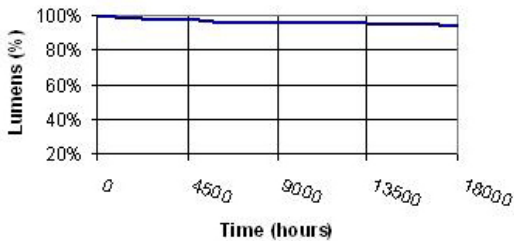

Lamp Mortality

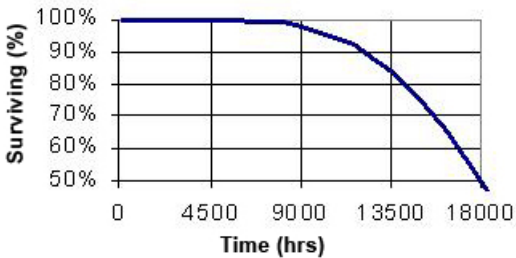

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T8
Base	Recessed Double Contact (R17d)
Wattage	86
Voltage	216
Rated Life	18000 hrs
Bulb Material	Soda lime
Starting Temperature	-29 °C (-20 °F)
LEED-EB MR Credit	658 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	8000
Mean Lumens	7600
Nominal Initial Lumens per Watt	93
Color Temperature	3500 K
Color Rendering Index (CRI)	78

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage (rapid start) Min @ Temperature	550 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	93.9100 in(2385.3 mm)
Minimum Overall Length	93.7200 in(2380.5 mm)
Nominal Length	96.000 in(2438.4 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.000 in(25.4 mm)
End of Base Pin to End of Opposite Pin End (C)	93.720 in(2380.5 mm)

PRODUCT INFORMATION

Product Code	12537
Description	F96T8/SP35/HO
ANSI Code	1501-1
Standard Package	Case
Standard Package GTIN	10043168125373
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168125376