




BECKWITH™

FP7964** 23" Ceiling Fan

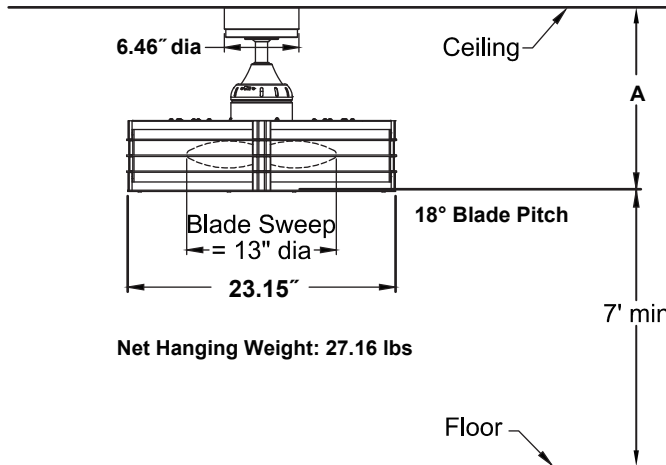

	A
Fan w/4.5" downrod	15.96"
Fan w/12" downrod	23.46"
Fan w/18" downrod	29.46"
Fan w/24" downrod	35.46"
Fan w/36" downrod	47.46"
Fan w/48" downrod	59.46"
Fan w/60" downrod	71.46"
Fan w/72" downrod	83.46"

Available Finishes	
OB	Oil-rubbed Bronze with Black Blade and Opal White Shade
BN	Brushed Nickel with Aluminum Blade and Opal White Shade

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

82 x 25 motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Four 43-watt E12 halogen candelabra base bulbs included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1238	1738	26	0.56	67
Med	620	1073	44	0.42	25
Low	507	804	45	0.36	18