

# LED-8035 Garage / Low Bay / Site

**60w = 175W**  
**LED**                      **MH / HPS**


**SKU No. (USA)**  
**LED-8035E30**  
**LED-8035E42**  
**LED-8035E57**

**SKU No. Canada**  
**LED-8035E30C 60W, 3000K**  
**LED-8035E42C 60W, 4200K**  
**LED-8035E57C 60W, 5700K**

**Description:**

60W LED retrofit design (LED-8025 with up lighting). Replaces MH and HPS lamps up to 175w. Design features both down and side mounted LEDs delivering a wide, uniform light distribution. Suitable for fully enclosed garage, low bay and other area fixtures. 60W power consumption

- Replaces up to a 175W HID
- 360° Illumination
- 120-277VAC, Non-Dimmable (USA)
- 120-347VAC, Non-Dimmable (Canada)
- Available in 3000K, 4200K & 5700K CCT
- >80 CRI
- 50,000 hr. rated L70 LED life
- Operating temp: -40°F - 122°F
- Double insulated
- Patented under 29/415,685
- UL Classified Damp (US & CA)
- 5 Year warranty

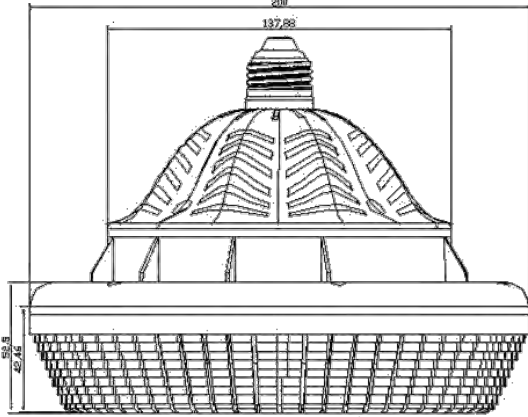

**Applications:**

LED Garage / Low Bay / Site LED for HID retrofit lamps lower energy costs, bulb and ballast replacement costs and also can greatly reduce costly equipment rental when re-lamping HID lamps on and off cycle. LED for HID retrofits will also eliminate lamp disposal issues due to the mercury content of many HID lamps.

- Parking Garage
- Low Bay
- Site

**Packaging: 4/Master Carton**

Unit : 10.25" x 10.25" x 8.27"  
 Master: 21.26" x 11.0 x 17.32"

**Installation Notes:**

- When installing LED-8000 series retrofit lamps within HID fixtures, ballast must be bypassed when present.
- 8000 series retrofits are UL damp rated, sealing the fixtures after installation will deliver best results.
- Installing surge/lightning protectors is highly recommended and helps to eliminate premature driver failure caused by surges and other power fluctuations.

**Technical Specifications**

<b>Bulb Type</b>	<b>HID Retrofit</b>	<b>Mounting</b>	<b>E26</b>
<b>Bulb Material</b>	<b>Aluminum/ Polycarbonate</b>	<b>LEDs:</b>	<b>183 Samsung #3535 SMD LED's</b>
<b>Power Consumption</b>	<b>60 watts</b>	<b>Beam Angle</b>	<b>360 °</b>
<b>Lumens</b>	<b>3000K: 4600 Lm 4200K: 4700 Lm 5700K: 4800 Lm</b>	<b>Dimmable</b>	<b>No</b>
<b>Efficacy</b>	<b>77-80 Lumens per watt</b>	<b>Replaces</b>	<b>Up to 175W HID</b>
<b>Rated LED Life</b>	<b>Up to 50,000 Hrs.</b>	<b>CCT</b>	<b>3000K 4200K 5700K</b>
<b>Power Factor:</b>	<b>&gt;99</b>	<b>CRI:</b>	<b>&gt; 80</b>
<b>IR / UV</b>	<b>None</b>	<b>Mercury/ Lead Content</b>	<b>None</b>
<b>Warranty</b>	<b>5 year Limited</b>	<b>Dimensions</b>	<b>5.91" X 7.87"</b>

Note: All specification information falls within a ± 2% range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.



**188 S. Northwest Highway • Cary, IL 60013**  
**(847) 380-3540 • FAX: (847) 380-3542**  
**www.led-llc.com**